



Test Report: LRS-75-48

75W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 43.2 V~52.8 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	41.525 V~ 54.721 V/230VAC 41.638 V~ 54.719 V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1 %~ 1 %	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.062 %~ 0.083 %
3	LINE REGULATION (Max)	V1: -0.5%~ 0.5 %	I/P: 100VAC~264VAC O/P:FULL LOAD Ta:25°C	V1: 0 %~0.021 %
4	LOAD REGULATION(Max)	V1: -0.5%~ 0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.062 %~ 0.083 %
5	OVER/UNDERSHOOT TEST	< ± 5 %	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< ± 5 %
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 114 mVp-p

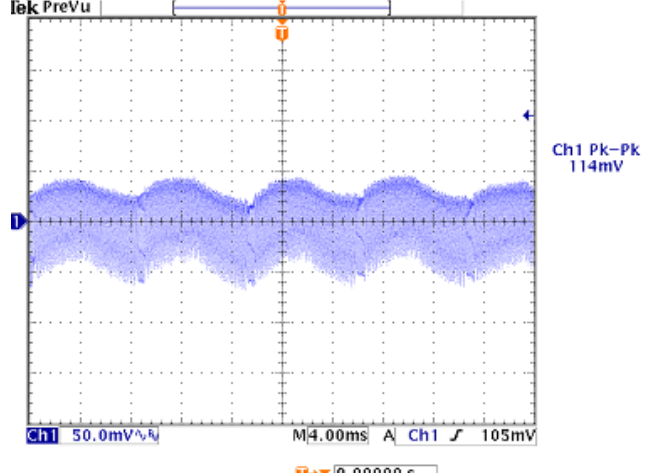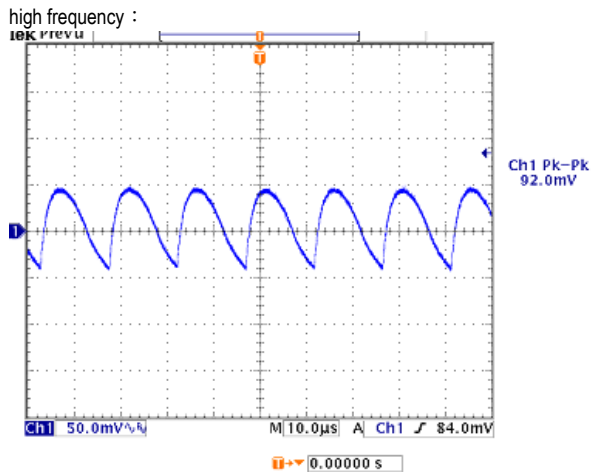

7	SET UP TIME(Max)	230VAC/ 500 ms 115VAC/ 500 ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 236ms 115VAC/ 226 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		

<p>8 RISE TIME (Max)</p>	<p>230VAC/ 30 ms 115VAC/ 30 ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 7.4 ms 115VAC/ 8 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p>			<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p>
<p>9 HOLD UP TIME (Typ.)</p>	<p>230VAC/ 60 ms 115VAC/ 12 ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 88.8 ms 115VAC/ 18.4 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>			<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>

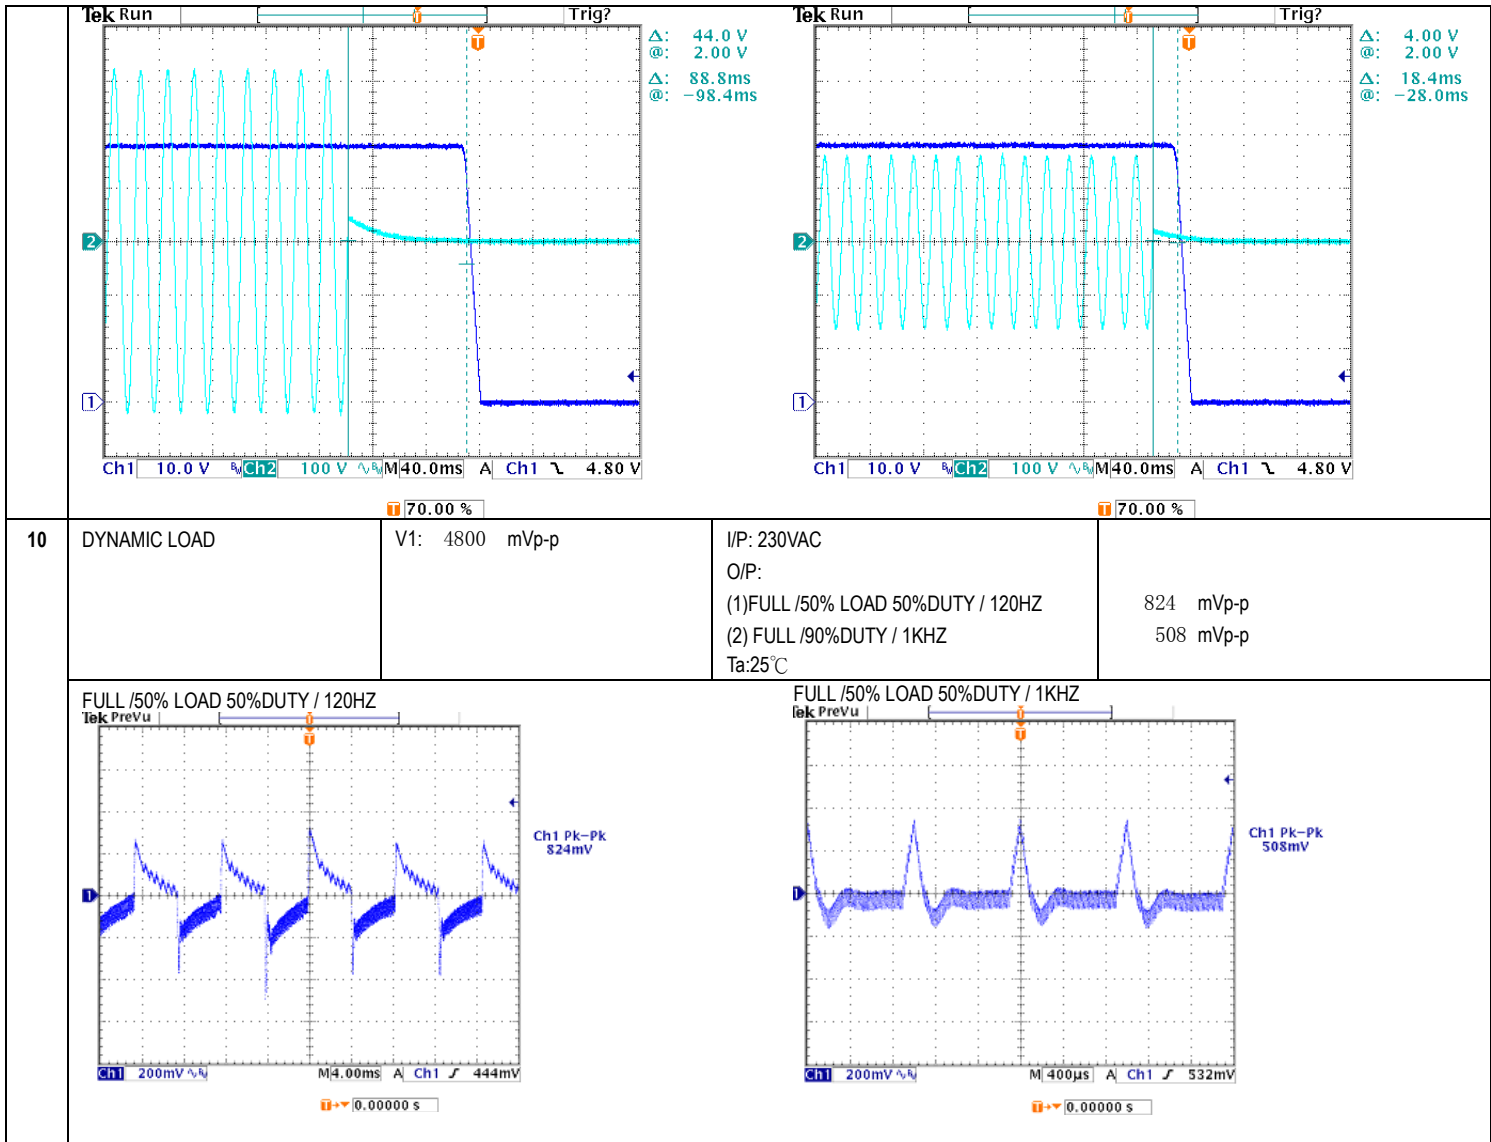


INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC	I/P: TESTING O/P: FULL LOAD Ta:25°C	75 V~264V
			I/P: LOW-LINE-3V=82 V HIGH-LINE+15%=300 V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~264 VAC O/P: FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 0.85 A 115V/ 1.4 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 0.690A/ 230VAC I = 1.145A/ 115VAC



4	LEAKAGE CURRENT	< 0.75mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.377 mA N-FG : 0.377 mA
5	NO LOAD CONSUMPTION	< 0.3W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.1462 W < 0.2408 W
6	EFFICIENCY(Typ.)	91.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	91.83 %


EFFICIENCY vs LOAD

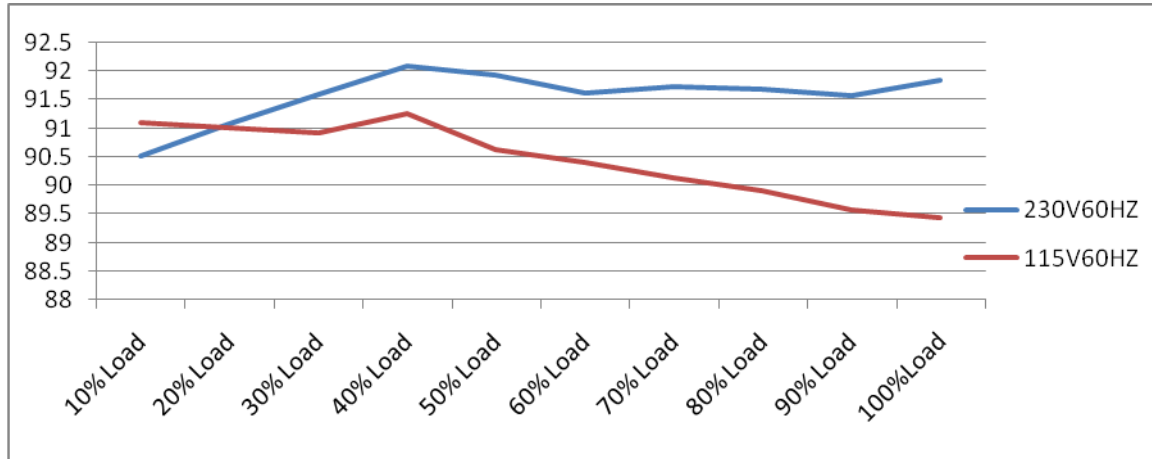

8	INRUSH CURRENT(Typ.)	230V/ 50 A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I = 39.2 A/ 230VAC
---	----------------------	--------------------------	---	--------------------

INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current (1V=1A)

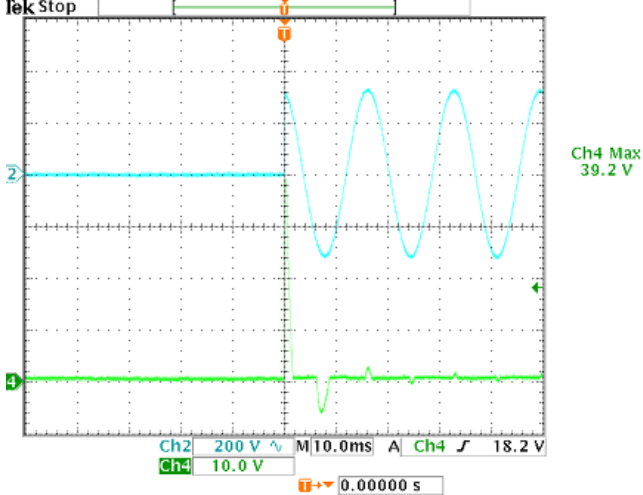

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %~ 150 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	126.9%/ 264VAC 128.8%/ 230VAC 118.9 %/100VAC PROTECTION TYPE : Hiccup mode recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	55. 2V~ 64.8 V	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta:25°C	61.4V/ 264VAC 61.5V/ 230VAC 61.5V/ 90VAC PROTECTION TYPE : shut down o/p voltage, re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 10A/ 600V	I/P: High-Line +3V =267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) 0%→400% Load. Ta:25°C	VDS: (1) 546V (2) 592V (3) 54 0V (4) 554V (5) 576 V
2	Diode Peak Voltage	Q100 Rated : 20A/300V	I/P: High-Line +3V =267 V AC ON/OFF O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) 0%→400% Load. Ta:25°C	Q100: VDS: (1) 200 V (2) 194 V (3) 208 V (4) 207 V (5) 234 V
3	Input Capacitor Voltage	C5 Rated: : 150 μ / 400 V 105 °C	I/P: High-Line +3V =267 V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change Ta:25°C	(1) 354 V (2) 360V (3) 350 V
4	Control IC Voltage Test	PWM IC U2 Rated : 28V 9.5V(MIN.)	I/P: High-Line +3V =267 V AC ON/OFF O/P(1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VR Min. LOW LINE Ta:25°C	(1) 18.6 V (2) 15.1V (3) 17.9V (4) 21.8V (5) 14.3 V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3. 75KVAC/min I/P-FG :2KVAC/min O/P-FG:1. 25KVAC/min	I/P-O/P: 4. 5 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1. 5 KVAC/min Ta:25°C	I/P-O/P: 2. 421 mA I/P-FG: 2. 166 mA O/P-FG: 1. 883mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P:>9999 MΩ I/P-FG: >9999MΩ O/P-FG: >9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	5mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P: FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																								
1	TEMPERATURE RISE TEST	MODEL : LRS-75-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 31.3°C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=52.5°C																																																										
		<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=31.3°C</th> <th>HIGH AMBIENT Ta=52.5°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>54.7°C</td><td>74.8°C</td></tr> <tr><td>2</td><td>BD1</td><td>60.2°C</td><td>80.7°C</td></tr> <tr><td>3</td><td>C5</td><td>57.8°C</td><td>77.9°C</td></tr> <tr><td>4</td><td>D5</td><td>77.4°C</td><td>99.5°C</td></tr> <tr><td>5</td><td>Q1</td><td>75.7°C</td><td>98.5°C</td></tr> <tr><td>6</td><td>C35</td><td>60.7°C</td><td>82.7°C</td></tr> <tr><td>7</td><td>T1</td><td>77.5°C</td><td>97.1°C</td></tr> <tr><td>8</td><td>C106</td><td>56.9°C</td><td>79.4°C</td></tr> <tr><td>9</td><td>C110</td><td>46.5°C</td><td>69.7°C</td></tr> <tr><td>10</td><td>L100</td><td>48.3°C</td><td>69.1°C</td></tr> <tr><td>11</td><td>Q100</td><td>69.6°C</td><td>91.5°C</td></tr> <tr><td>12</td><td>U1</td><td>67.0°C</td><td>87.7°C</td></tr> <tr><td>13</td><td>D30</td><td>58.8°C</td><td>80.8°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=31.3°C	HIGH AMBIENT Ta=52.5°C	1	LF1	54.7°C	74.8°C	2	BD1	60.2°C	80.7°C	3	C5	57.8°C	77.9°C	4	D5	77.4°C	99.5°C	5	Q1	75.7°C	98.5°C	6	C35	60.7°C	82.7°C	7	T1	77.5°C	97.1°C	8	C106	56.9°C	79.4°C	9	C110	46.5°C	69.7°C	10	L100	48.3°C	69.1°C	11	Q100	69.6°C	91.5°C	12	U1	67.0°C	87.7°C	13	D30	58.8°C	80.8°C		
NO	Position	ROOM AMBIENT Ta=31.3°C	HIGH AMBIENT Ta=52.5°C																																																									
1	LF1	54.7°C	74.8°C																																																									
2	BD1	60.2°C	80.7°C																																																									
3	C5	57.8°C	77.9°C																																																									
4	D5	77.4°C	99.5°C																																																									
5	Q1	75.7°C	98.5°C																																																									
6	C35	60.7°C	82.7°C																																																									
7	T1	77.5°C	97.1°C																																																									
8	C106	56.9°C	79.4°C																																																									
9	C110	46.5°C	69.7°C																																																									
10	L100	48.3°C	69.1°C																																																									
11	Q100	69.6°C	91.5°C																																																									
12	U1	67.0°C	87.7°C																																																									
13	D30	58.8°C	80.8°C																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 122% LOAD Ta : 25°C	TEST : OK																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta=-30°C	TEST : OK																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta=50°C HUMIDITY= 95 %R.H	TEST : OK																																																								
5	TEMPERATURE COEFFICIENT	±0.008%/°C (0-50°C)	I/P : 230 VAC O/P : FULL LOAD	±0.008%/°C (0-50°C)																																																								
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																								
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ +70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																								



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=50°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=50°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=50°C LIFE TIME	(1) 491401HRS (2) 79353HRS (3) 151235HRS (4) 182365HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE : 681.2KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014