



# Test Report: LRS-100-36

---

100W Single Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST


ENVIRONMENT TEST

## DESIGN VERIFY TEST


### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 32.4 V~ 39.6 V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	31.299V~40.888V/230VAC 31.298V~40.882V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1%~ 1%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.013%~ 0.013%
3	LINE REGULATION (Max)	V1: -0.5%~ 0.5%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1:-0%~0%
4	LOAD REGULATION(Max)	V1: -0.5%~0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0%~0%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 110mVp-p

high frequency :

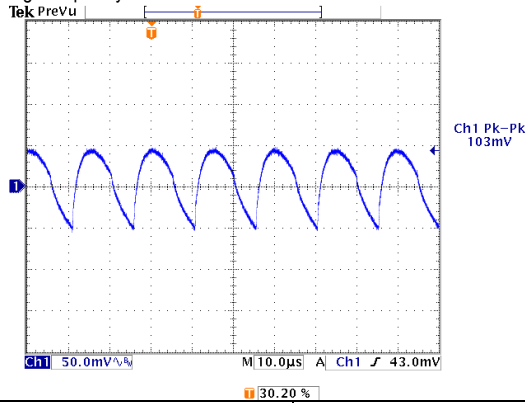


low frequency :

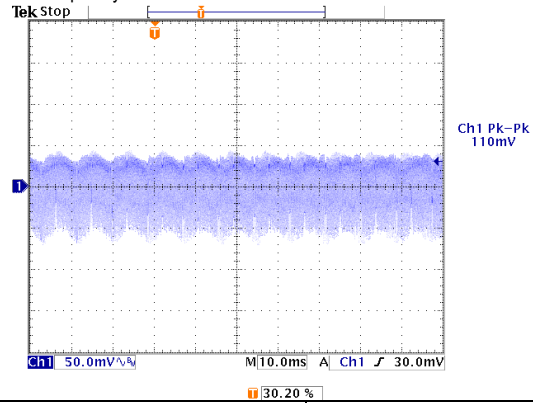

7	SET UP TIME(Max)	230VAC/500ms 115VAC/ 500ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 238ms 115VAC/ 236ms
---	------------------	-------------------------------	--	--------------------------------


INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage CH4 : AC Input Voltage

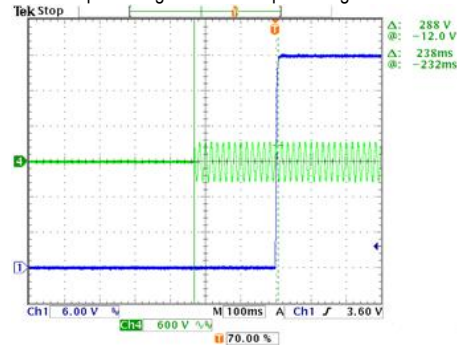

INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH4 : AC Input Voltage

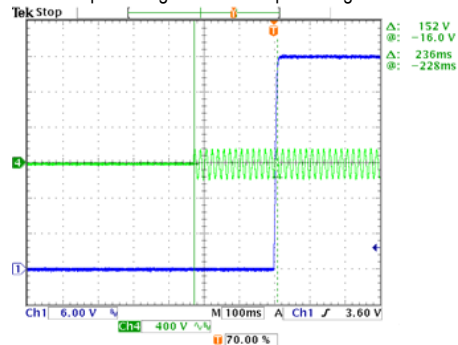



100W Single Output Switching Power Supply


LRS-100series

8	RISE TIME (Max)	230VAC/ 30ms 115VAC/ 30ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/5.00ms 115VAC/5.40ms
INPUT=230VAC/50HZ @ FULL LOAD		INPUT=115VAC/60HZ @ FULL LOAD		
CH1 : Output Voltage		CH1 : Output Voltage		
9	HOLD UP TIME(Typ )	230VAC/ 55ms 115VAC/ 10ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 66.4ms 115VAC/ 16.0ms
INPUT=230VAC/50HZ @ FULL LOAD		INPUT=115VAC/60HZ @ FULL LOAD		
CH1 : Output Voltage CH4 : AC Input Voltage		CH1 : Output Voltage CH4 : AC Input Voltage		
10	DYNAMIC LOAD	V1: 3600 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	352mVp-p 314mVp-p
FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ		



INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	74V~264V
			I/P: (1)LOW-LINE-3V=167 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS ( POWER ON/OFF NO DAMAGE )	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 1.2A 115V/ 1.9A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =1.00A/ 230VAC I =1.68A/ 115VAC
4	LEAKAGE CURRENT	< 0.75 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.325mA N-FG: 0.312mA
5	NO LOAD CONSUMPTION	< 0.3 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	<0.153 W <0.232 W
6	INRUSH CURRENT(Typ)	230V/50A COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =36.0A/ 230VAC
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH2 : Input current (1V=1A) CH4 : AC Input Voltage</p> <p>Ch2 Max 36.0 V</p> <p>Ch2 10.0 V M 400µs A Ch2 12.0 V</p> <p>Ch4 100 V V</p> <p>30.80 %</p>				
7	EFFICIENCY(Typ)	90.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	90.74%

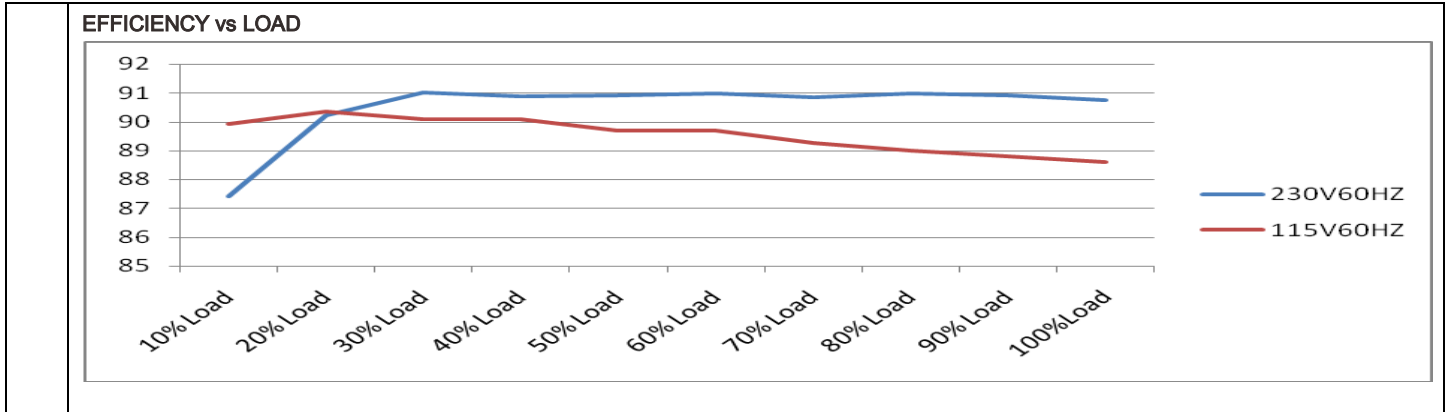

### PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 150%	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	130%/ 230VAC 129.6%/115VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	CH:41.4V~48.6V	I/P: 230VAC I/P: 115VAC O/P: MIN LOAD Ta:25°C	47.60%/ 230VAC 47.59 %/115VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Hiccup Mode



**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor ( D to S) or (C to E) <b>Peak Voltage</b>	Q1 Rated 11 A/ 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	(1)460V (2)556V (3)544V (4)532V (5)536V (6)548V (7)460V
2	<b>Diode Peak Voltage</b>	Q101 Rated 20 A/ 300V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q101: (1)266V (2)282V (3)280V (4)280V (5)276V (6)280V (7)292V (8)238V
3	<b>Input Capacitor Voltage</b>	C5 Rated: 150 μ /400V 105°C	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)366V (2)368V (3)368V
4	<b>Control IC Voltage Test</b>	PWM IC U1 Rated 28 V(MAX) 9.5V(MIN.	I/P:High-Line +3V =267 V AC ON/OFF O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR Min. LOW LINE Ta:25°C	(1) 18.6V (2) 16V (3) 17.8V (4) 22.2V (5) 14.5V
5	<b>Clamp Diode Peak Voltage</b>	D 5 Rated: 800 V 2 A	I/P: High-Line +3V = 267 V AC ON/OFF O/P: (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta: 25°C	(1) 460V (2) 452V

## SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25°C	I/P-O/P:2.235mA I/P-FG:1.865mA O/P-FG:0.809m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: >99999MΩ I/P-FG: >99999 MΩ O/P-FG: >99999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	3mΩ

## E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P: FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL/50% LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

## RELIABILITY TEST

### ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL: LRS-100-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=18.6°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=51.9°C																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 18.6 °C</th> <th>HIGH AMBIENT Ta=51.9 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td><b>U1</b></td><td>46.2°C</td><td>79.1°C</td></tr> <tr><td>2</td><td><b>D30</b></td><td>48.2°C</td><td>81.1°C</td></tr> <tr><td>3</td><td><b>LF1</b></td><td>44.3°C</td><td>78.5°C</td></tr> <tr><td>4</td><td><b>BD1</b></td><td>51.1°C</td><td>83.7°C</td></tr> <tr><td>5</td><td><b>C5</b></td><td>42.7°C</td><td>74.2°C</td></tr> <tr><td>6</td><td><b>D5</b></td><td>52.2°C</td><td>86.6°C</td></tr> <tr><td>7</td><td><b>Q1</b></td><td>51.6°C</td><td>86.6°C</td></tr> <tr><td>8</td><td><b>R15</b></td><td>51.7°C</td><td>86.1°C</td></tr> <tr><td>9</td><td><b>C35</b></td><td>43.0°C</td><td>76.2°C</td></tr> <tr><td>10</td><td><b>T1coil</b></td><td>56.3°C</td><td>89.4°C</td></tr> <tr><td>11</td><td><b>T1coil</b></td><td>60.9°C</td><td>93.7°C</td></tr> <tr><td>12</td><td><b>C105</b></td><td>46.1°C</td><td>78.9°C</td></tr> <tr><td>13</td><td><b>Q101</b></td><td>62.5°C</td><td>94.6°C</td></tr> <tr><td>14</td><td><b>L100</b></td><td>39.0°C</td><td>72.1°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 18.6 °C	HIGH AMBIENT Ta=51.9 °C	1	<b>U1</b>	46.2°C	79.1°C	2	<b>D30</b>	48.2°C	81.1°C	3	<b>LF1</b>	44.3°C	78.5°C	4	<b>BD1</b>	51.1°C	83.7°C	5	<b>C5</b>	42.7°C	74.2°C	6	<b>D5</b>	52.2°C	86.6°C	7	<b>Q1</b>	51.6°C	86.6°C	8	<b>R15</b>	51.7°C	86.1°C	9	<b>C35</b>	43.0°C	76.2°C	10	<b>T1coil</b>	56.3°C	89.4°C	11	<b>T1coil</b>	60.9°C	93.7°C	12	<b>C105</b>	46.1°C	78.9°C	13	<b>Q101</b>	62.5°C	94.6°C	14	<b>L100</b>	39.0°C	72.1°C
NO	Position	ROOM AMBIENT Ta= 18.6 °C	HIGH AMBIENT Ta=51.9 °C																																																													
1	<b>U1</b>	46.2°C	79.1°C																																																													
2	<b>D30</b>	48.2°C	81.1°C																																																													
3	<b>LF1</b>	44.3°C	78.5°C																																																													
4	<b>BD1</b>	51.1°C	83.7°C																																																													
5	<b>C5</b>	42.7°C	74.2°C																																																													
6	<b>D5</b>	52.2°C	86.6°C																																																													
7	<b>Q1</b>	51.6°C	86.6°C																																																													
8	<b>R15</b>	51.7°C	86.1°C																																																													
9	<b>C35</b>	43.0°C	76.2°C																																																													
10	<b>T1coil</b>	56.3°C	89.4°C																																																													
11	<b>T1coil</b>	60.9°C	93.7°C																																																													
12	<b>C105</b>	46.1°C	78.9°C																																																													
13	<b>Q101</b>	62.5°C	94.6°C																																																													
14	<b>L100</b>	39.0°C	72.1°C																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P: 230 VAC O/P: 124 %LOAD Ta: 25°C	TEST: OK																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 %LOAD Ta= -30 °C	TEST: OK																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST: OK																																																												
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P: 230 VAC O/P: FULL LOAD	0%/°C (0~40°C)																																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																												





100W Single Output Switching Power Supply

**LRS-100series**

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta=50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 50 °C LIFE TIME	(1) 396481HRS (2) 72523HRS (3) 104095HRS (4) 156612HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 720.6KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014