



# Test Report: HLG-150H-20

---

150W Constant Voltage + Constant Current LED Driver

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Other Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RIPPLE & NOISE	V1: 150 mVp-p (Max)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	V1: 18 mVp-p (Max)
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 17V-22 V	I/P: 230 VAC I/P:115VAC O/P:MIN LOAD Ta:25°C	16.59 V-22.51 V /230VAC 16.59 V-22.51 V/115VAC
3	CURRENT ADJ RANGE	4.5A-7.5A	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	3.08 A-10.79 A
4	CONSTANT CURRENT REGION	10V-20V	I/P: 230 VAC O/P:CV MODE Ta:25°C	O/P=10V: 7.57 A O/P=19V: 7.57 A
5	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ 1% (Max)	I/P: 100 VAC /305VAC O/P:FULL/ 0% LOAD Ta:25°C	V1: -.03 %-0.3 %
6	LINE REGULATION	V1: - 0.5% ~ 0.5% (Max)	I/P:100 VAC ~305 VAC O/P:FULL LOAD Ta:25°C	V1: 0 %- 0 %
7	LOAD REGULATION	V1: - 1% ~ 1% (Max)	I/P: 230 VAC O/P:FULL -MIN LOAD Ta:25°C	V1: -0.3 %- 0.3 %
8	SET UP TIME	230VAC/ 500 ms (Max) 115VAC/ 1000 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 396 ms 115 VAC/ 826 ms
9	RISE TIME	230VAC/ 200 ms (Max) 115VAC/ 200 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 6.7 ms 115 VAC/ 6.7 ms
10	HOLD UP TIME	230VAC/ 16 ms (Typ) 115VAC/ 16 ms (Typ)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 20 ms 115 VAC/ 20 ms
11	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST:< 5 %
12	DYNAMIC LOAD	V1: 2000 mVp-p	I/P: 230 VAC O/P:(1)FULL /Min LOAD 90%DUTY/1KHZ (2)FULL /Min LOAD 90%DUTY/120HZ Ta:25°C	850 mVp-p 1310 mVp-p

13	DIMMER TEST (B Type only)	SPEC:											
		*Reference resistance value for output current adjustment (Typical)											
		Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*1 ~ 10V dimming function for output current adjustment (Typical)											
		Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*10V PWM signal for output current adjustment (Typical)											
		Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		TEST RESULT: I/P : 230 VAC ; Ta : 25°C											
		1	Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K
			Output current	0.989A	1.707A	2.433A	3.604A	3.975A	4.782A	5.445A	6.181A	6.991A	7.767A
%	13.19%		22.76%	32.44%	48.05%	53.00%	63.76%	72.60%	82.41%	93.21%	103.56%		
2	Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V		
	Output current	0.987A	1.709A	2.421A	3.195A	3.926A	4.654A	5.370A	6.112A	6.829A	7.562A		
	%	13.16%	22.79%	32.28%	42.60%	52.35%	62.05%	71.60%	81.49%	91.05%	100.83%		
3	Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%		
	Output current	1.074A	1.795A	2.535A	3.279A	4.009A	4.735A	5.463A	6.192A	6.923A	7.651A		
	%	14.32%	23.93%	33.80%	43.72%	53.45%	63.13%	72.84%	82.56%	92.31%	102.01%		

**INPUT FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	71 V~305V
			I/P: (1)LOW-LINE-3V=87 V (2)HIGH-LINE=305 V O/P:FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE )	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305VAC O/P:FULL-MIN LOAD Ta:25°C	OK
3	POWER FACTOR	0.95/ 230 VAC FULL LOAD (TYP) 0.98/ 115 VAC FULL LOAD (TYP) 0.92/ 115 VAC FULL LOAD (TYP)	I/P: 230 VAC I/P: 115 VAC I/P: 277 VAC O/P:FULL LOAD Ta:25°C	PF=0.968 /230V/100%LOAD PF= 0.997 /115V/100%LOAD PF=. /277V/100%LOAD
4	EFFICIENCY	93% (TYP)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	93.07 %
5	INPUT CURRENT	277V/ 0.7 A 230 V/ 0.75 A 115 V/ 1.7 A	I/P: 277 VAC I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 0.63 A/ 277VAC I = 0.73 A/ 230VAC I = 1.49 A/ 115VAC
6	INRUSH CURRENT	230 V/ 65A (Typ) COLD START	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	I = 58 A/ 230VAC
7	TOTAL HARMONIC DISTORTION	THD< 20% when output loading $\geq$ 60% at 115VAC/230VAC input and output loading $\geq$ 75% at 277VAC input	I/P : 115 VAC I/P : 230 VAC O/P : 60% LOAD  I/P : 277 VAC O/P : 75%LOAD Ta : 25°C	THD : 9.11 /115VAC THD : 14.33 /230VAC  THD : 15.95 /277VAC

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95 %-108 %	I/P: 305VAC I/P: 230 VAC I/P: 100 VAC O/P:TESTING Ta:25°C	106 %/305VAC 106 %/ 230VAC 106 %//100VAC Constant current limiting, recovers automatically after fault condition is removed

2	OVER VOLTAGE PROTECTION	V1: 23V~ 27V	I/P: 305VAC I/P: 230 VAC I/P: 90 VAC O/P:MIN LOAD Ta:25°C	25.19 V/ 305VAC 25.19 V/ 230VAC 25.19 V/ 100VAC Shut down o/p voltage with auto recovery or re-power on to recovery
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P:FULL LOAD	O.T.P. Active Shut down o/p voltage with auto recovery or re-power on to recovery
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Constant current limiting, recovers automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor ( D to S) or (C to E) Peak Voltage	Q5 Rated 12A/500V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 474 V (2) 448 V (3) 450 V
2	Diode Peak Voltage	Q101 Rated 80A/75V	I/P : High-Line +3V =308V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 55.8 V (2) 13.2 V (3) 52.8 V
		Q102 Rated 80A/75V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 54.4 V (2) 43.8 V (3) 51.4 V
3	Input Capacitor Voltage	C5 Rated: 100u/450V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 433.4 V (2) 433.5 V (3) 433.4 V
4	Control IC Voltage Test	U 900 Rated 8.85V~16V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 13.443 V (2) 13.339 V (3) 13.320 V
5	P.F.C Transistor ( D to S) or (C to E) Peak Voltage	Q1 Rated 17A/600V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 492 V (2) 446 V (3) 458 V

**SAFETY & EMC TEST**

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG:2KVAC/min<4.5ma O/P-FG:1.5KVAC/min	I/P-O/P: 4 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P: 2.581 mA I/P-FG: 2.302 mA O/P-FG: 3.28 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 30 GΩ I/P-FG: 28.3 GΩ O/P-FG: 30 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	9 mΩ
4	LEAKAGE CURRENT	IEC60950-1 < 0.75 mA / 240VAC	I/P: 240 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.22 mA N-FG: 0.22 mA
5	APPROVAL	TUV: Certificate NO : E334940 UL: File NO : R50185176		


**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ LOAD:LED/ELECTRONIC LOAD O/P:100%LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55022 EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																												
1	TEMPERATURE RISE TEST	MODEL : HLG-150H-24 1. ROOM AMBIENT BURN-IN : 15.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 27.8 °C 2. HIGH AMBIENT BURN-IN : 7 HRS I/P : 230VAC O/P : FULL LOAD Ta=57.8 °C	<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 27.8 °C</th> <th>HIGH AMBIENT Ta=57.8 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>50.5°C</td><td>77.5°C</td></tr> <tr><td>2</td><td>Q1</td><td>54.3°C</td><td>81.3°C</td></tr> <tr><td>3</td><td>L2</td><td>56.1°C</td><td>83.1°C</td></tr> <tr><td>4</td><td>Q5</td><td>55.2°C</td><td>82.2°C</td></tr> <tr><td>5</td><td>D2</td><td>56.3°C</td><td>83.3°C</td></tr> <tr><td>6</td><td>RTH2</td><td>51.5°C</td><td>78.5°C</td></tr> <tr><td>7</td><td>T1</td><td>56.5°C</td><td>83.5°C</td></tr> <tr><td>8</td><td>Q101</td><td>52.2°C</td><td>79.2°C</td></tr> <tr><td>9</td><td>D9</td><td>53.1°C</td><td>80.1°C</td></tr> <tr><td>10</td><td>C102</td><td>49.9°C</td><td>76.9°C</td></tr> <tr><td>11</td><td>C201</td><td>50.4°C</td><td>77.4°C</td></tr> <tr><td>12</td><td>C16</td><td>52.0°C</td><td>79.0°C</td></tr> <tr><td>13</td><td>C106</td><td>47.9°C</td><td>74.9°C</td></tr> <tr><td>14</td><td>C38</td><td>55.5°C</td><td>82.5°C</td></tr> <tr><td>15</td><td>LF100</td><td>48.7°C</td><td>75.7°C</td></tr> <tr><td>16</td><td>U900</td><td>52.7°C</td><td>79.7°C</td></tr> <tr><td>17</td><td>U1</td><td>53.0°C</td><td>80.0°C</td></tr> <tr><td>18</td><td>C5</td><td>46.4°C</td><td>76°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 27.8 °C	HIGH AMBIENT Ta=57.8 °C	1	BD1	50.5°C	77.5°C	2	Q1	54.3°C	81.3°C	3	L2	56.1°C	83.1°C	4	Q5	55.2°C	82.2°C	5	D2	56.3°C	83.3°C	6	RTH2	51.5°C	78.5°C	7	T1	56.5°C	83.5°C	8	Q101	52.2°C	79.2°C	9	D9	53.1°C	80.1°C	10	C102	49.9°C	76.9°C	11	C201	50.4°C	77.4°C	12	C16	52.0°C	79.0°C	13	C106	47.9°C	74.9°C	14	C38	55.5°C	82.5°C	15	LF100	48.7°C	75.7°C	16	U900	52.7°C	79.7°C	17	U1	53.0°C	80.0°C	18	C5	46.4°C	76°C	
NO	Position	ROOM AMBIENT Ta= 27.8 °C	HIGH AMBIENT Ta=57.8 °C																																																																													
1	BD1	50.5°C	77.5°C																																																																													
2	Q1	54.3°C	81.3°C																																																																													
3	L2	56.1°C	83.1°C																																																																													
4	Q5	55.2°C	82.2°C																																																																													
5	D2	56.3°C	83.3°C																																																																													
6	RTH2	51.5°C	78.5°C																																																																													
7	T1	56.5°C	83.5°C																																																																													
8	Q101	52.2°C	79.2°C																																																																													
9	D9	53.1°C	80.1°C																																																																													
10	C102	49.9°C	76.9°C																																																																													
11	C201	50.4°C	77.4°C																																																																													
12	C16	52.0°C	79.0°C																																																																													
13	C106	47.9°C	74.9°C																																																																													
14	C38	55.5°C	82.5°C																																																																													
15	LF100	48.7°C	75.7°C																																																																													
16	U900	52.7°C	79.7°C																																																																													
17	U1	53.0°C	80.0°C																																																																													
18	C5	46.4°C	76°C																																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 305 VAC O/P : O/P SHORT TEST Ta= 25°C	TEST : OK																																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305 VAC/100VAC O/P : 95% LOAD Ta= -40 °C	TEST : OK																																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 305 VAC O/P : 95% LOAD Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK																																																																												
5	TEMPERATURE COEFFICIENT	± 0.03 %(0-50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.002%(0-50°C)																																																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC.		OK																																																																												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load TURN ON/58 SEC;TURN OFF/2 SEC.		OK																																																																												

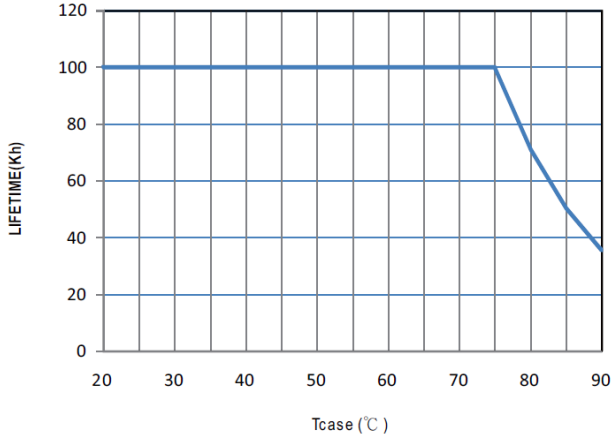

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	HLG-150H-24:SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60 °C LIFE TIME	(1) 819990HRS (2) 89216HRS (3) 125461HRS (4) 147312HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 192.2K hrs min. MIL-HDBK-217F (25°C)	OK
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 62,000 hours @ Tcase 75°C 	OK

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

2003/12/12 A50-F023