



Test Report: HLG-60H-42

60W Constant Voltage + Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	25.2V~42V	I/P : 230VAC O/P : CV=25.2V~41V Ta : 25°C	TEST : OK
2	RIPPLE & NOISE	V1 : 300 mVp-p (Max)	I/P : 230VAC O/P : FULL LOAD Ta : 25°C	V1 : 28.8 mVp-p (Max)
3	OUTPUT VOLTAGE ADJUST RANGE	CH1 : 40 V ~ 46 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	38.847 V ~ 47.968 V / 230 VAC 38.850 V ~ 47.968 V / 115 VAC
4	CURRENT ADJUST RANGE	CH1 : 0.87A ~ 1.45A	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	0.7508 A ~ 1.5368 A / 230 VAC 0.508 A ~ 1.5356 A / 115 VAC
5	OUTPUT VOLTAGE TOLERANCE	V1 : 1 %~ -1 % (Max)	I/P : 100 VAC / 305VAC O/P : FULL / MIN LOAD Ta : 25°C	V1 : 0.42 %~ -0.42 %
6	LINE REGULATION	V1 : 0.5 %~ -0.5 % (Max)	I/P : 100VAC ~ 305VAC O/P : FULL LOAD Ta : 25°C	V1 : 0.11 %~ -0.11 %
7	LOAD REGULATION	V1 : 0.5 %~ -0.5 % (Max)	I/P : 230 VAC O/P : FULL ~MIN LOAD Ta : 25°C	V1 : 0.31 %~ -0.321 %
8	SET UP TIME	230VAC : 500 ms (Max) 115VAC : 500 ms(Max)	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 356 ms 115VAC/ 303 ms
9	RISE TIME	230VAC : 80 ms (Max) 115VAC : 80 ms (Max)	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 19 ms 115VAC/ 19 ms
10	HOLD UP TIME	230VAC : 16 ms (TYP) 115VAC : 16 ms (TYP)	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 77 ms 115VAC/ 42 ms
11	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	TEST : <5 %
12	DYNAMIC LOAD	V1 : 4200 mVp-p	I/P : 230 VAC (1).O/P : FULL /Min LOAD 90%DUTY/ 1KHZ (2).O/P : FULL /Min LOAD 50%DUTY/ 120HZ Ta : 25°C	(1)114 mVp-p (2)1100 mVp-p

13	DIMMER TEST (for B-type only)	SPEC:											
		*Reference resistance value for output current adjustment (Typical)											
		Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*1 ~ 10V dimming function for output current adjustment (Typical)											
		Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*10V PWM signal for output current adjustment (Typical)											
		Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		TEST RESULT: I/P : 230 VAC ; Ta : 25°C											
		1	Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K
			Output current	0.131A	0.276A	0.428A	0.573A	0.719A	0.866A	1.007A	1.151A	1.310A	1.450A
%	9.03%		19.03%	29.52%	39.52%	49.59%	59.72%	69.45%	79.38%	90.34%	100.00%		
2	Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V		
	Output current	0.144A	0.280A	0.429A	0.578A	0.728A	0.876A	1.025A	1.174A	1.324A	1.455A		
	%	9.93%	19.31%	29.59%	39.86%	50.21%	60.41%	70.69%	80.97%	91.31%	100.34%		
3	Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%		
	Output current	0.170A	0.330A	0.487A	0.633A	0.778A	0.916A	1.049A	1.181A	1.312A	1.445A		
	%	11.72%	22.76%	33.59%	43.66%	53.66%	63.17%	72.34%	81.45%	90.48%	99.66%		

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	71 V~305V
			I/P : LOW-LINE-3V= 87 V HIGH-LINE+10V=315 V O/P : FULL/MIN LOAD ON : 30 Sec . OFF : 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P : 90 VAC ~ 305 VAC O/P : FULL -MIN LOAD Ta : 25°C	TEST : OK
3	POWER FACTOR	0.95 / 230 VAC(TYP) 0.98 / 115 VAC(TYP) 0.92 / 277 VAC(TYP)	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF= 0.958 / 230 VAC PF= 0.998 / 115 VAC PF= 0.932 / 277 VAC
4	EFFICIENCY	90 % (TYP)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	90.48 %
5	INPUT CURRENT	277V/ 0.3 A (TYP) 230V/ 0.32 A (TYP) 115V/ 0.64 A (TYP)	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 0.25 A/ 277 VAC I = 0.302 A/ 230 VAC I = 0.59 A/ 115 VAC
6	INRUSH CURRENT	230V/ 55 A (TYP) COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I = 59 A/ 230 VAC
7	LEAKAGE CURRENT	< 0.75 mA/ 277 VAC	I/P : 277 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.22 mA N-FG : 0.20 mA
8	TOTAL HARMONIC DISTORTION	THD< 20% when output loading ≥ 60% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input	I/P : 115 VAC I/P : 230 VAC O/P : 60% LOAD	THD : 7.19 /115VAC THD : 16.48 /230VAC
			I/P : 277 VAC O/P : 75%LOAD Ta : 25°C	THD : 18.32 /277VAC

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95 % ~ 108 %	I/P : 230 VAC I/P : 115 VAC O/P : TESTING Ta : 25°C	105 %/ 230 VAC 105 %/ 115 VAC Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH1 : 48 V ~ 58 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	51.23 V/ 230 VAC 51.50 V/ 115 VAC Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P : 230 VAC O/P : FULL LOAD	O.T.P. Active Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P : 305 VAC O/P : FULL LOAD Ta : 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated : 10A/600V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 520 V (2) 490 V (3) 484 V
2	Diode Peak Voltage	D101 Rated : 30A/200V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 178 V (2) 180 V (3) 175 V
3	Clamp Diode Peak Voltage	D2 Rated : 2A/800V	I/P : High-Line +3V = 308 V O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1) 628 V (2) 636 V
4	Input Capacitor Voltage	C 5 Rated : 47u/450V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 431.81 V (2) 438.09 V (3) 440.24 V
5	Control IC Voltage Test	U1 Rated : 11V~30V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 21.458 V (2) 21.567 V (3) 21.582 V
6	Power Transistor (D to S) or (C to E) Peak Voltage	Q3 Rated : 10A/700V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 684 V (2) 576 V (3) 684 V

■ SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.75 KVAC/min I/P-FG : 2 KVAC/min<4.5mA O/P-FG : 1.5 KVAC/min	I/P-O/P : 4 KVAC/min I/P-FG : 2.4KVAC/min O/P-FG : 1.8 KVAC/min Ta : 25°C	I/P-O/P : 1.831 mA I/P-FG : 2.371 mA O/P-FG : 0.484 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ I/P-FG : 500VDC>100MΩ O/P-FG : 500VDC>100MΩ	I/P-O/P : 500 VDC I/P-FG : 500 VDC O/P-FG : 500 VDC Ta : 25°C /70%RH	I/P-O/P : 30 GΩ I/P-FG : 30 GΩ O/P-FG : 30 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta : 25°C / 70%RH	9 mΩ

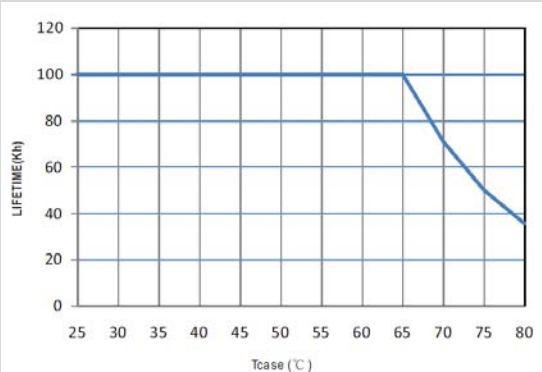
E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VA50HZ O/P:100% ELECTRONIC LOAD O/P:100%/LED LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																												
1	TEMPERATURE RISE TEST	MODEL : HLG-60H-24 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : 95% LOAD Ta= 28 °C 2. HIGH AMBIENT BURN-IN : 1 HRS I/P : 230VAC O/P : 95% LOAD Ta= 68.5 °C	<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 28 °C</th> <th>HIGH AMBIENT Ta=68.5°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>49.4°C</td><td>85.5°C</td></tr> <tr><td>2</td><td>LF2</td><td>48.2°C</td><td>84.5°C</td></tr> <tr><td>3</td><td>L1</td><td>49.0°C</td><td>85.4°C</td></tr> <tr><td>4</td><td>L3</td><td>48.6°C</td><td>85.1°C</td></tr> <tr><td>5</td><td>C10</td><td>47.9°C</td><td>84.4°C</td></tr> <tr><td>6</td><td>Q1</td><td>50.6°C</td><td>87.3°C</td></tr> <tr><td>7</td><td>Q3</td><td>58.1°C</td><td>97.2°C</td></tr> <tr><td>8</td><td>U1</td><td>50.8°C</td><td>87.6°C</td></tr> <tr><td>9</td><td>RTH2</td><td>47.9°C</td><td>83.9°C</td></tr> <tr><td>10</td><td>D2</td><td>56.8°C</td><td>95.5°C</td></tr> <tr><td>11</td><td>C5</td><td>49.2°C</td><td>85.3°C</td></tr> <tr><td>12</td><td>C16</td><td>48.9°C</td><td>85.0°C</td></tr> <tr><td>13</td><td>T1</td><td>56.6°C</td><td>93.5°C</td></tr> <tr><td>14</td><td>D101</td><td>54.7°C</td><td>91.4°C</td></tr> <tr><td>15</td><td>C106</td><td>52.4°C</td><td>89.1°C</td></tr> <tr><td>16</td><td>C203</td><td>47.6°C</td><td>84.0°C</td></tr> <tr><td>17</td><td>LF100</td><td>49.1°C</td><td>86.0°C</td></tr> <tr><td>18</td><td>C111</td><td>48.7°C</td><td>85.7°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 28 °C	HIGH AMBIENT Ta=68.5°C	1	BD1	49.4°C	85.5°C	2	LF2	48.2°C	84.5°C	3	L1	49.0°C	85.4°C	4	L3	48.6°C	85.1°C	5	C10	47.9°C	84.4°C	6	Q1	50.6°C	87.3°C	7	Q3	58.1°C	97.2°C	8	U1	50.8°C	87.6°C	9	RTH2	47.9°C	83.9°C	10	D2	56.8°C	95.5°C	11	C5	49.2°C	85.3°C	12	C16	48.9°C	85.0°C	13	T1	56.6°C	93.5°C	14	D101	54.7°C	91.4°C	15	C106	52.4°C	89.1°C	16	C203	47.6°C	84.0°C	17	LF100	49.1°C	86.0°C	18	C111	48.7°C	85.7°C	
NO	Position	ROOM AMBIENT Ta= 28 °C	HIGH AMBIENT Ta=68.5°C																																																																													
1	BD1	49.4°C	85.5°C																																																																													
2	LF2	48.2°C	84.5°C																																																																													
3	L1	49.0°C	85.4°C																																																																													
4	L3	48.6°C	85.1°C																																																																													
5	C10	47.9°C	84.4°C																																																																													
6	Q1	50.6°C	87.3°C																																																																													
7	Q3	58.1°C	97.2°C																																																																													
8	U1	50.8°C	87.6°C																																																																													
9	RTH2	47.9°C	83.9°C																																																																													
10	D2	56.8°C	95.5°C																																																																													
11	C5	49.2°C	85.3°C																																																																													
12	C16	48.9°C	85.0°C																																																																													
13	T1	56.6°C	93.5°C																																																																													
14	D101	54.7°C	91.4°C																																																																													
15	C106	52.4°C	89.1°C																																																																													
16	C203	47.6°C	84.0°C																																																																													
17	LF100	49.1°C	86.0°C																																																																													
18	C111	48.7°C	85.7°C																																																																													
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 95% LOAD Ta= -40°C / -25	TEST : OK																																																																												
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 305 VAC O/P : 95% LOAD Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK																																																																												
4	TEMPERATURE COEFFICIENT	± 0.03 % (0-50°C)	I/P : 230 VAC O/P : 95% LOAD	± 0.006 % (0-50°C)																																																																												
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																												
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																																												

7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
8	CAPACITOR LIFE CYCLE	HLG-60H-24 :SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=60 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60 °C LIFE TIME	(1) 425374 HRS (2) 42555 HRS (3) 75886 HRS (4) 99715 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 1132K hrs min. Telcordia SR-332 (Bellcore) ; 338K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 62,000 hours @ Tcase 70°C 	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

2009/08/04 A50-F023