



Test Report: DDR-240C-48

240W DIN Rail Type DC-DC Converter

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 48 V~ 56V	I/P:NORMAL VOLTAGE O/P:MIN LOAD Ta:25 °C	CH1: 45.20 V~ 57.84V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: -1%~1 %	I/P: 33.6VDC /67.2VDC O/P:FULL/ MIN. LOAD Ta:25 ~	V1: -0.05%~ 0.03%
3	LINE REGULATION (Max)	V1: -0.5 %~ 0.5%	I/P: 33.6 VDC /67.2VDC O/P:FULL LOAD Ta:25 ~	V1: 0 %~ 0.02%
4	LOAD REGULATION (Max)	V1: -1 %~ 1 %	I/P: 48VDC O/P:FULL ~MIN LOAD Ta:25 ~	V1: -0.05%~ 0.03%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 48VDC O/P:FULL LOAD Ta:25 ~	TEST:1.2%
6	RIPPLE & NOISE (Max)	V1: 100 mVp-p	I/P:48VDC O/P:FULL LOAD Ta:25 ~	V1: 34 mVp-p

high frequency

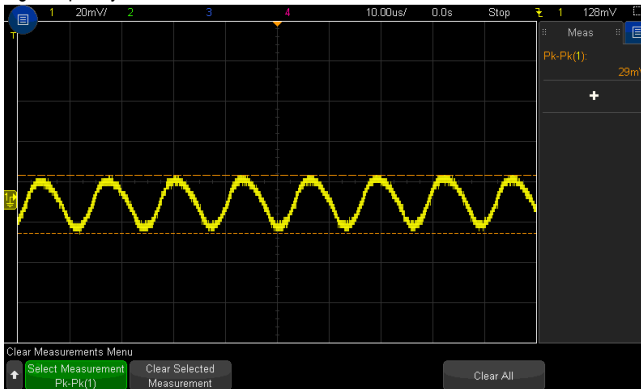


low frequency



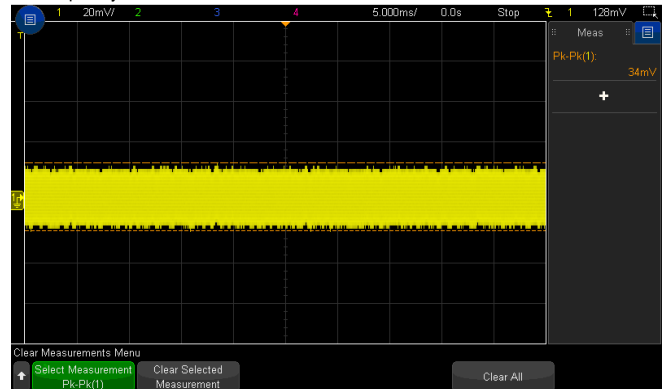


7	SET UP TIME (Max)	48VDC/ 500 ms	I/P: 48VDC O/P:FULL LOAD Ta:25 ~	48VDC/ 44.6 ms
---	-------------------	---------------	--	----------------

INPUT=48VDC @ FULL LOAD

CH1 : Output Voltage CH2 : DC Input Voltage

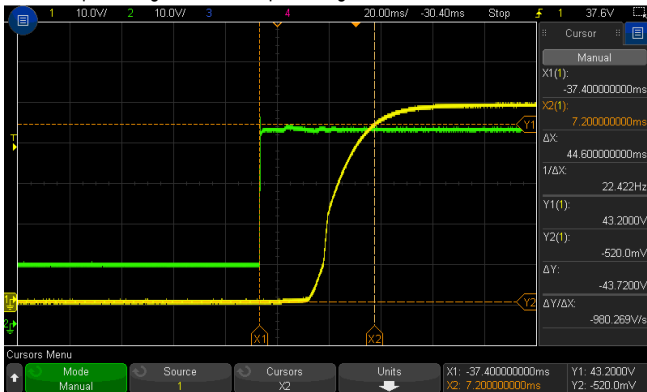


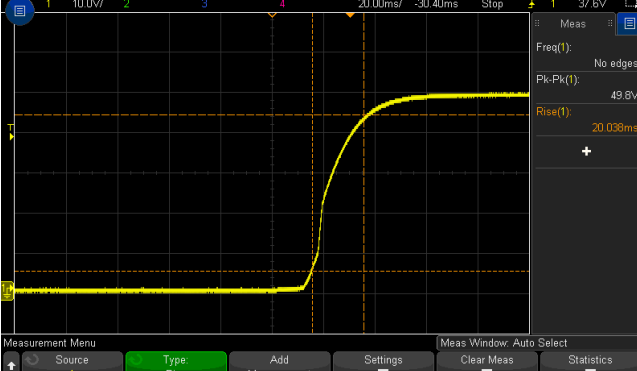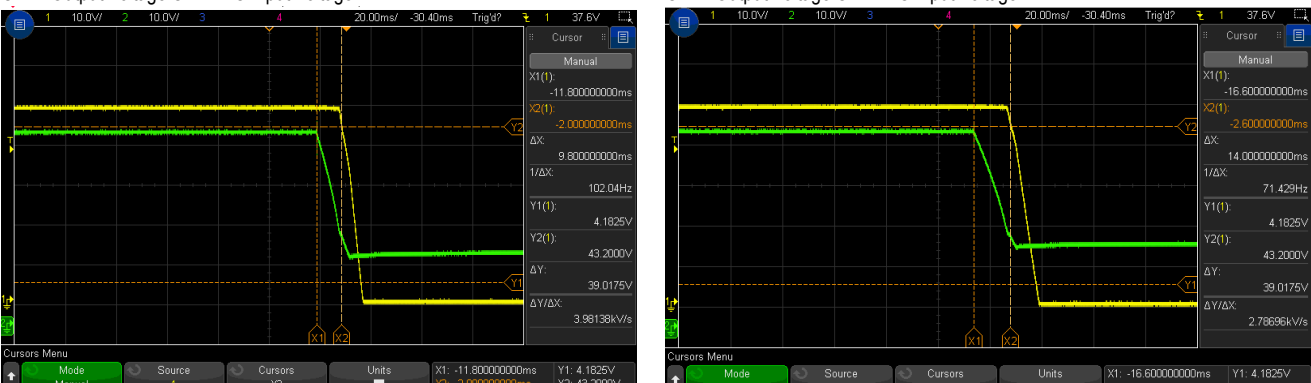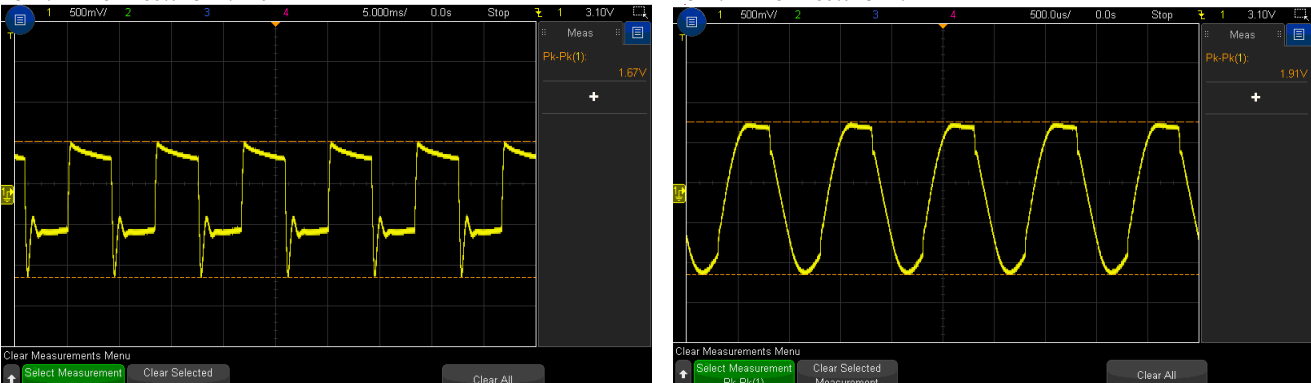8	RISE TIME (Max)	48VDC/60ms	I/P: 48VDC O/P: FULL LOAD Ta:25 ~	48VDC/ 20.04ms
<p>INPUT=48VDC @ FULL LOAD</p> 				
9	HOLD UP TIME (TYP)	48VDC/8ms 48VDC/10ms@70%LOAD	I/P: 48VDC O/P: FULL LOAD Ta:25 ~	48VDC/ 9.8 ms 48VDC/ 14.0 ms@70%LOAD
<p>INPUT=48VDC @ FULL LOAD INPUT=48VDC @ 70% LOAD</p> <p>CH1 : Output Voltage CH2 : DC Input Voltage CH1 : Output Voltage CH2 : DC Input Voltage</p> 				
10	DYNAMIC LOAD	V1: 4800 mVp-p	I/P: 48VDC O/P: (1) FULL /MIN LOAD 50%DUTY / 120HZ (2) FULL /MIN LOAD 50%DUTY / 1KHZ Ta:25 ~	1670mVp-p 1910mVp-p
<p>FULL /MIN LOAD 50%DUTY / 120HZ FULL /MIN LOAD 50%DUTY / 1KHZ</p> 				

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	33.6VDC~67.2VDC	I/P:TESTING O/P:FULL LOAD Ta:25 ~	32.6V~67.2V
			I/P: LOW-LINE-0.2=33.4V HIGH-LINE+3V=70.2V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT CURRENT(TYP)	48VDC/5.6A	I/P:48VDC O/P:FULL LOAD Ta:25 ~	I =5.36A/48VDC
3	EFFICIENCY(TYP)	92%	I/P: 48VDC O/P:FULL LOAD Ta:25 ~	92.7 %

EFFICIENCY vs LOAD

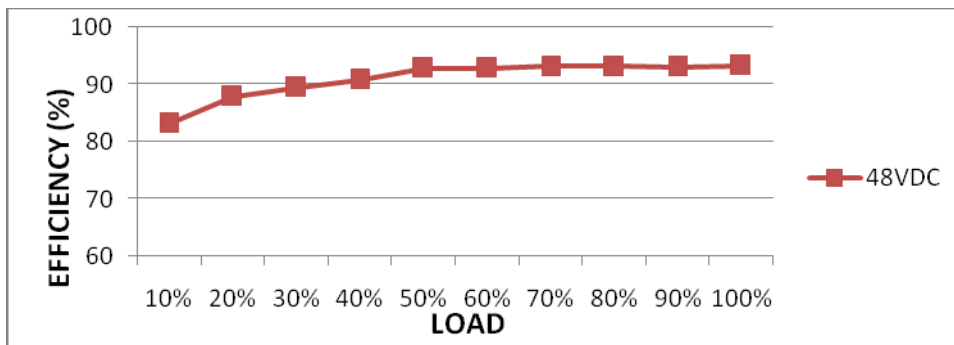

4	INRUSH CURRENT(TYP)	48VDC/30 A COLD START	I/P:48 VDC O/P:FULL LOAD Ta:25 ~	I =22.7A/ 48VDC
---	---------------------	--------------------------	--	-----------------

INPUT=48VDC @ FULL LOAD



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 %~135 %RATED OUTPUT POWER	I/P: 67.2VDC I/P: 48VDC I/P: 33.6VDC O/P: TESTING Ta:25 ~	122.7%/ 67.2VDC 123.0%/ 48VDC 122.7%/ 33.6VDC PROTECTION TYPE Normally works within 150% rated output power for more than 3 seconds and then constant current protection 105~135% rated output power with auto-recovery
2	OVER VOLTAGE PROTECTION	CH: 57.6 V~ 65.0 V	I/P:67.2VDC I/P: 48VDC I/P: 33.6VDC O/P:MIN LOAD Ta:25 ~	61.4V/67.2VDC 61.4V/ 48VDC 61.8V/ 33.6VDC PROTECTION TYPE Shut down O/P voltage,re-power on to recover
3	OVER TEMPERATURE PROTECTION	SPEC: NO DAMAGE Shut down o/p voltage, re-power on to recover	I/P:48VDC O/P: FULL LOAD Ta:25 ~	O.T.P. PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P:67.2VDC O/P: FULL LOAD Ta:25 ~	NO DAMAGE PROTECTION TYPE constant current protection 105~135% rated output power with auto-recovery
5	INPUT REVERSE	POWER OK	I/P: 67.2VDC O/P: NO LOAD Ta:25 ~	NO DAMAGE

FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1.	DC OK RELAY CONTACT RATINGS (max.)	30VDC/1A resistive load	I/P: 30VDC O/P:30 Ω Ta:25°C	TEST: OK
2.	CURRENT SHARING	Up to 960W (3+1 units)	I/P: 48VDC O/P:960W Ta:25°C	TEST: OK
3	REMOTE ON-OFF CONTROL	TB1 PIN2,4 Open or 4~10VDC Power supply ON Short or 0~0.8VDC Power supply OFF	I/P: 48VDC O/P:Min Load Ta:25°C	TEST: OK Pin=0.216W

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q11 Rated : 200V	I/P:High-Line +3V =70.2V DC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) FULL LOAD CONTINUE Ta:25 ~	VDS: (1) 120.8V (2) 94.3V (3) 102.3V



2	Clamp MOSFET (D to S) or (C to E) Peak Voltage	Q 6 Rated : 200V	I/P:High-Line +3V =70.2V DC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) FULL LOAD CONTINUE Ta:25 ~	VDS: (1) 121.6V (2) 73.3V (3) 97.5V
3	Diode Peak Voltage	D100 Rated : 400 V D102 Rated : 400 V	I/P:High-Line +3V =70.2V DC ON/OFF O/P: (1)Full Load (2)Output Short (3) FULL LOAD CONTINUE Ta:25 ~	D100: (1)303V (2)70V (3)84V D102: (1)313V (2)285V (3)323V
4	Input Capacitor Voltage	C7 Rated: : 100µF / 16V	I/P:High-Line +3V =70.2V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25 ~	(1)71.5V (2)72.3V (3)70.7V (4)70.7V
5	Control IC Voltage Test	PWM IC U1 Rated -0.3V~16V	I/P:High-Line +3V =70.2 V DC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR ' ~.LOW LINE Ta:25 ~	(1) 13.7V (2) 9.6V (3) 13.7V (4) 13.5V (5) 9.4V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P:4KVDC/min I/P-FG:2.5 KVDC/min O/P-FG:0.71KVDC/min	I/P-O/P: 4.4KVDC/min I/P-FG: 3 KVDC/min O/P-FG:0.85KVDC/min Ta:25 ~	I/P-O/P: 0 mA I/P-FG: 0mA O/P-FG: 0 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25 ~	I/P-O/P: 1 GΩ I/P-FG: 1GΩ O/P-FG: 1GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25 ~	10mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	<input checked="" type="checkbox"/> EN55032 ; EN55011 ; CLASS A <input checked="" type="checkbox"/> CLASS B	I/P:48VDC O/P:FULL LOAD Ta:25 ~	<input checked="" type="checkbox"/> PASS ; FAIL Test by certified Lab
2	CONDUCTION	<input checked="" type="checkbox"/> EN55032 ; EN55011 ; CLASS A <input checked="" type="checkbox"/> CLASS B	I/P:48VDC O/P:FULL LOAD Ta:25 ~	<input checked="" type="checkbox"/> PASS ; FAIL Test by certified Lab
3	E.S.D	EN61000-4-2 <input type="checkbox"/> Din rail Model: AIR: 8KV / Contact: 6KV	I/P:48VDC O/P:FULL LOAD Ta:25 ~	<input checked="" type="checkbox"/> CRITERIA A ; CRITERIA B



4	E.F.T	EN61000-4-4 ; INDUSTRY INPUT: 2KV	I/P: 48VDC O/P: FULL LOAD Ta: 25 ~	<input checked="" type="checkbox"/> CRITERIA A ; CRITERIA B
5	SURGE	IEC61000-4-5 ; INDUSTRY L-N : 1KV L,N-FG: 2KV	I/P: 48VDC O/P: FULL LOAD Ta: 25 ~	<input checked="" type="checkbox"/> CRITERIA A ; CRITERIA B
6	Test by certified Lab Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																												
1	TEMPERATURE RISE TEST	MODEL DDR-240C-24 1. ROOM AMBIENT BURN-IN 1.5 HRS I/P 48VDC O/P FULL LOAD Ta= 24.2 ~ 2. HIGH AMBIENT BURN-IN HRS I/P 48VDC O/P FULL LOAD Ta= 50.8 ~																																																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 24.2 ~</th> <th>HIGH AMBIENT Ta= 50.8 ~</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>61.8 ~</td><td>92.9 ~</td></tr> <tr><td>2</td><td>Q3</td><td>64.9 ~</td><td>97.2 ~</td></tr> <tr><td>3</td><td>LF100</td><td>74.2 ~</td><td>104.9 ~</td></tr> <tr><td>4</td><td>LF2</td><td>61.6 ~</td><td>92.6 ~</td></tr> <tr><td>5</td><td>T1</td><td>67.5 ~</td><td>98.5 ~</td></tr> <tr><td>6</td><td>T2</td><td>63.3 ~</td><td>93.5 ~</td></tr> <tr><td>7</td><td>L100</td><td>72.8 ~</td><td>104.0 ~</td></tr> <tr><td>8</td><td>C3</td><td>58.1 ~</td><td>89.4 ~</td></tr> <tr><td>9</td><td>D100</td><td>86.4 ~</td><td>115.5 ~</td></tr> <tr><td>10</td><td>D105</td><td>80.6 ~</td><td>109.3 ~</td></tr> <tr><td>11</td><td>C103</td><td>71.5 ~</td><td>101.4 ~</td></tr> <tr><td>12</td><td>C104</td><td>64.9 ~</td><td>96.0 ~</td></tr> <tr><td>13</td><td>Q6</td><td>60.1 ~</td><td>90.5 ~</td></tr> <tr><td>14</td><td>Q12</td><td>62.3 ~</td><td>93.8 ~</td></tr> <tr><td>15</td><td>C21</td><td>60.7 ~</td><td>90.9 ~</td></tr> <tr><td>16</td><td>R43</td><td>45.5 ~</td><td>74.6 ~</td></tr> <tr><td>17</td><td>U1</td><td>62.6 ~</td><td>92.1 ~</td></tr> <tr><td>18</td><td>C109</td><td>62.6 ~</td><td>93.8 ~</td></tr> <tr><td>19</td><td>TSW1</td><td>72.9 ~</td><td>102.8 ~</td></tr> <tr><td>20</td><td></td><td></td><td></td></tr> <tr><td>21</td><td></td><td></td><td></td></tr> <tr><td>22</td><td></td><td></td><td></td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 24.2 ~	HIGH AMBIENT Ta= 50.8 ~	1	LF1	61.8 ~	92.9 ~	2	Q3	64.9 ~	97.2 ~	3	LF100	74.2 ~	104.9 ~	4	LF2	61.6 ~	92.6 ~	5	T1	67.5 ~	98.5 ~	6	T2	63.3 ~	93.5 ~	7	L100	72.8 ~	104.0 ~	8	C3	58.1 ~	89.4 ~	9	D100	86.4 ~	115.5 ~	10	D105	80.6 ~	109.3 ~	11	C103	71.5 ~	101.4 ~	12	C104	64.9 ~	96.0 ~	13	Q6	60.1 ~	90.5 ~	14	Q12	62.3 ~	93.8 ~	15	C21	60.7 ~	90.9 ~	16	R43	45.5 ~	74.6 ~	17	U1	62.6 ~	92.1 ~	18	C109	62.6 ~	93.8 ~	19	TSW1	72.9 ~	102.8 ~	20				21				22			
NO	Position	ROOM AMBIENT Ta= 24.2 ~	HIGH AMBIENT Ta= 50.8 ~																																																																																													
1	LF1	61.8 ~	92.9 ~																																																																																													
2	Q3	64.9 ~	97.2 ~																																																																																													
3	LF100	74.2 ~	104.9 ~																																																																																													
4	LF2	61.6 ~	92.6 ~																																																																																													
5	T1	67.5 ~	98.5 ~																																																																																													
6	T2	63.3 ~	93.5 ~																																																																																													
7	L100	72.8 ~	104.0 ~																																																																																													
8	C3	58.1 ~	89.4 ~																																																																																													
9	D100	86.4 ~	115.5 ~																																																																																													
10	D105	80.6 ~	109.3 ~																																																																																													
11	C103	71.5 ~	101.4 ~																																																																																													
12	C104	64.9 ~	96.0 ~																																																																																													
13	Q6	60.1 ~	90.5 ~																																																																																													
14	Q12	62.3 ~	93.8 ~																																																																																													
15	C21	60.7 ~	90.9 ~																																																																																													
16	R43	45.5 ~	74.6 ~																																																																																													
17	U1	62.6 ~	92.1 ~																																																																																													
18	C109	62.6 ~	93.8 ~																																																																																													
19	TSW1	72.9 ~	102.8 ~																																																																																													
20																																																																																																
21																																																																																																
22																																																																																																
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P VDC O/P 123 LOAD Ta 25 ~	TEST OK																																																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P 43.2 VDC / 67.2 VDC O/P 100 LOAD Ta= -40 ~	TEST OK																																																																																												



4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 55 ~ NO DAMAGE	I/P VDC O/P FULL LOAD Ta= 55 ~ HUMIDITY= 95 %R.H	TEST OK												
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~55 ~)	I/P 48 VDC O/P FULL LOAD	± 0.0063 %(0~50 ~)												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC		TEST OK												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C ~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 48VDC/Full Load DC ON/OFF TEST turn on 3sec : turn off 1sec@15cycle \ 48VDC/Full Load DC ON@1cycle		TEST OK												
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform Sine Wave (2) Frequency 10~500Hz (3) Sweep Time 10min/sweep cycle (4) Acceleration 5G (5) Test Time 60min in each axis (X.Y.Z) (6) Ta 25 ~ 2 Din Rail <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Displacement</th> <th>Acceleration</th> </tr> </thead> <tbody> <tr> <td>2 (+3/-0) Hz up to 15Hz</td> <td>± 2.5mm</td> <td>_____</td> </tr> <tr> <td>15Hz up to 50Hz</td> <td>_____</td> <td>2.3g</td> </tr> <tr> <td>Sweep rate</td> <td colspan="2">Max 1 Octave/minute</td> </tr> </tbody> </table>			Displacement	Acceleration	2 (+3/-0) Hz up to 15Hz	± 2.5mm	_____	15Hz up to 50Hz	_____	2.3g	Sweep rate	Max 1 Octave/minute		TEST OK
	Displacement	Acceleration														
2 (+3/-0) Hz up to 15Hz	± 2.5mm	_____														
15Hz up to 50Hz	_____	2.3g														
Sweep rate	Max 1 Octave/minute															
9	CAPACITOR LIFE CYCLE	SUPPOSE C103 IS THE MOST CRITICAL COMPONENT (1) I/P 48VDC O/P FULL LOAD Ta= 25 ~ LIFE TIME (2) I/P 48VDC O/P FULL LOAD Ta= 50 ~ LIFE TIME (3) I/P 48VDC O/P 75% LOAD Ta= 50 ~ LIFE TIME (4) I/P 48VDC O/P 50% LOAD Ta= 50 ~ LIFE TIME		(1) 388811.3 HRS (2) 54648.8 HRS (3) 136176.4 HRS (4) 295617 HRS												
10	MTBF	Conducted by Parts Stress Analysis Prediction 484.9K hrs min. Telcordia SR-332 (Bellcore) ; 189.9K hrs min. MIL-HDBK-217F (25 ~)														
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50 ~														

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

12.10.30 A50-F031