



# Test Report: LRS-200-3.3

---

200W Single Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

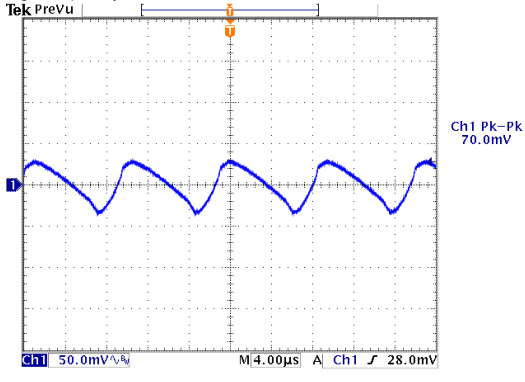
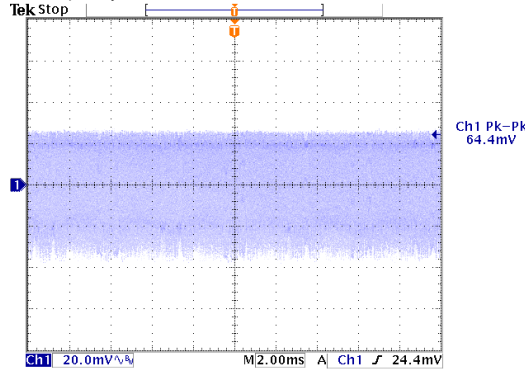
E.M.C. Test

## ■ RELIABILITY TEST

ENVIRONMENT TEST

## DESIGN VERIFY TEST

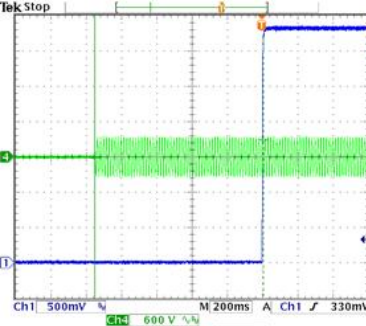
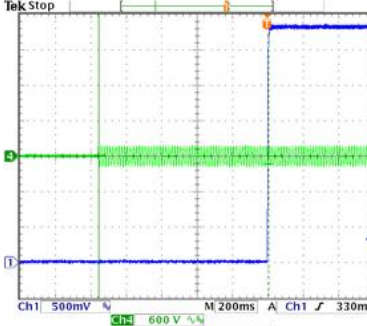
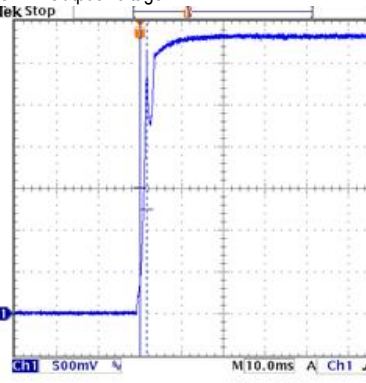
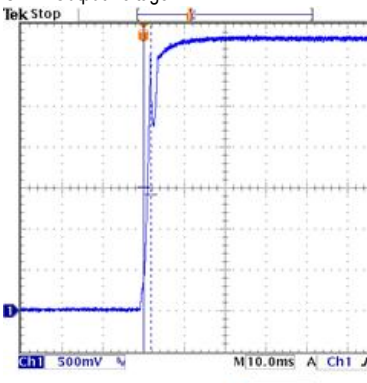
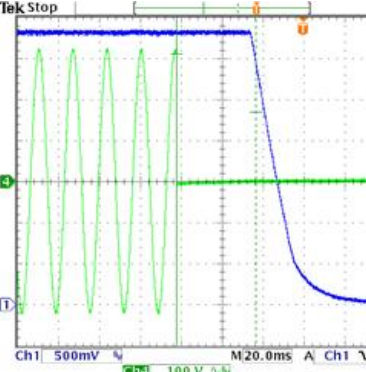
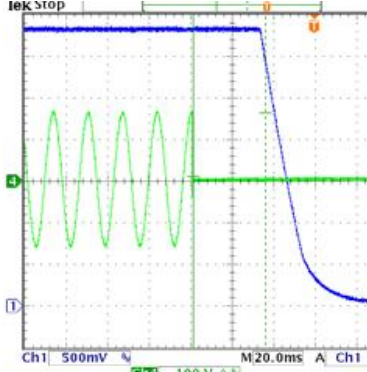
### OUTPUT FUNCTION TEST

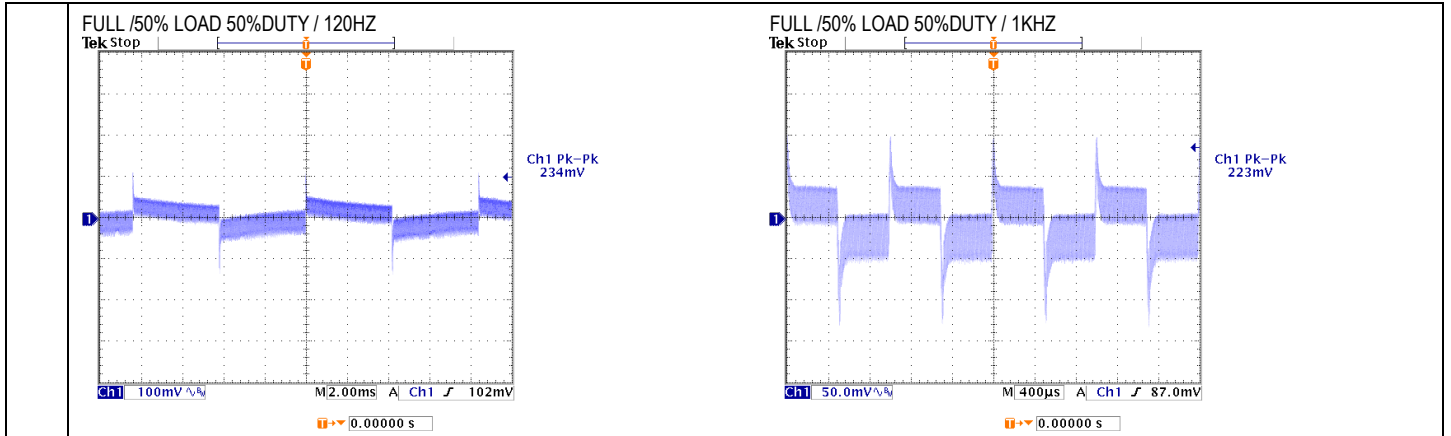
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 2.97~3.6V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	2.862V~3.803V/230VAC 2.866V~3.807V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -3%~3%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0.3%~0.3%
3	LINE REGULATION (Max)	V1: -0.5%~0.5%	I/P: 100VAC~264VAC O/P:FULL LOAD Ta:25°C	V1: -0.3%~-0.3%
4	LOAD REGULATION(Max)	V1:2.5%~2.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0.0%~0%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 70.0mVp-p
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency :</p>  <p>Ch1 Pk-Pk 70.0mV</p> </div> <div style="text-align: center;"> <p>low frequency :</p>  <p>Ch1 Pk-Pk 64.4mV</p> </div> </div>		
7	SET UP TIME(Max)	230VAC/1300ms 115VAC/ 1300ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 956ms 115VAC/ 960ms



200W Single Output Switching Power Supply

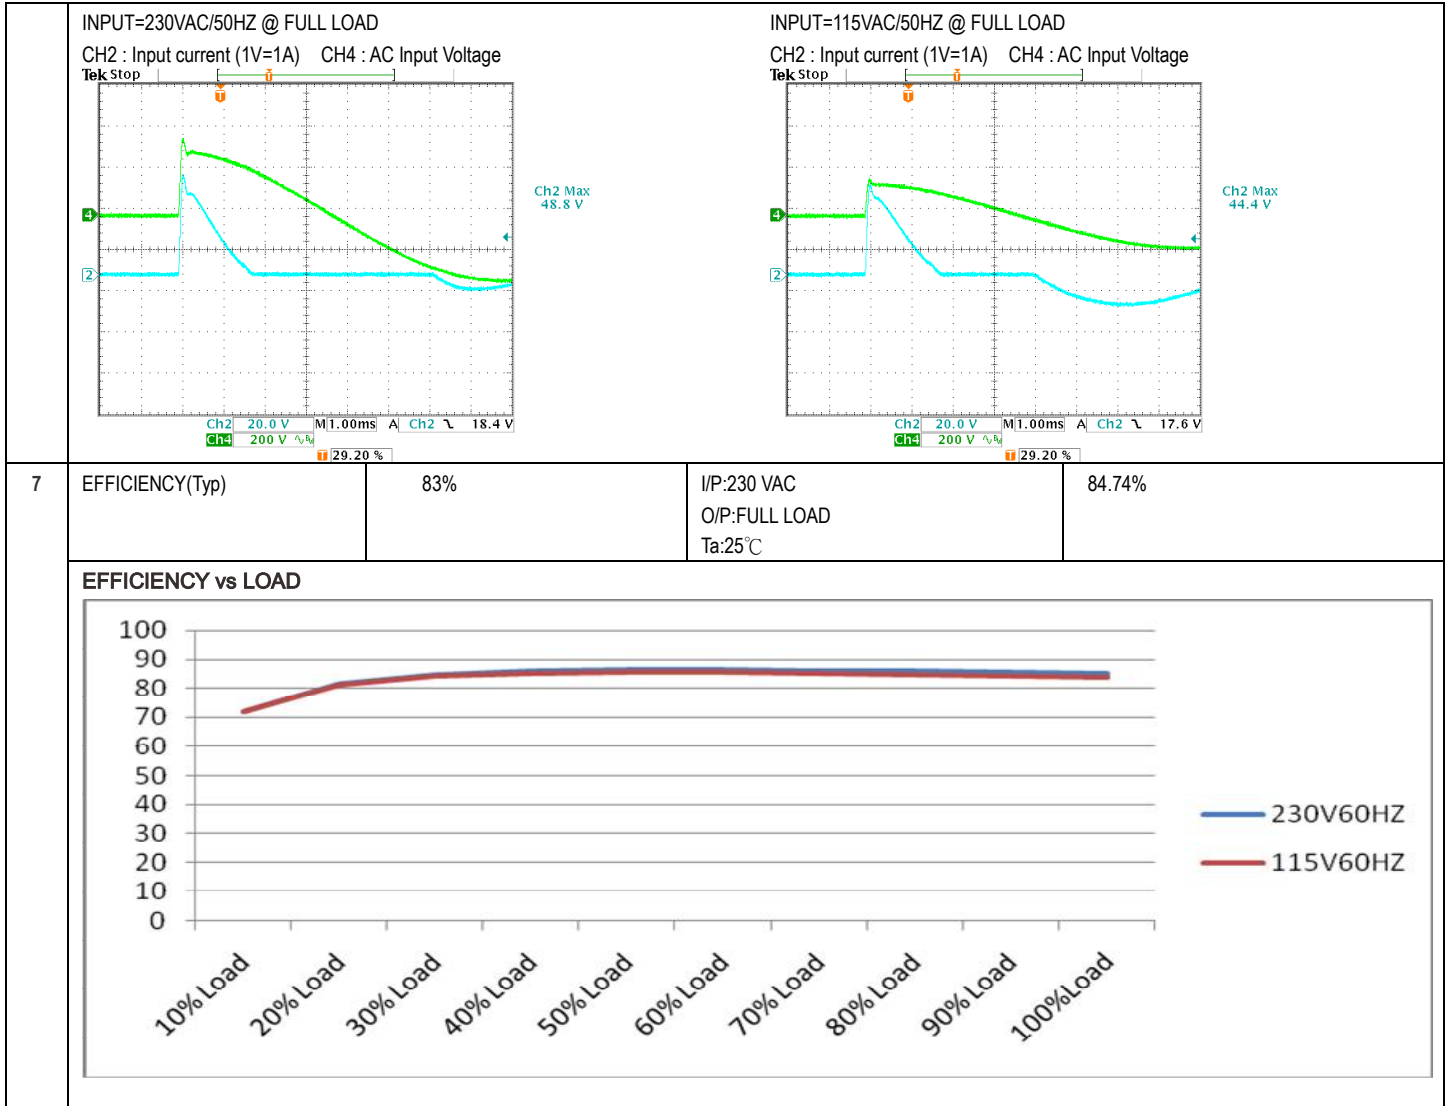
LRS-200series

	<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage</p> 		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage</p> 	
8	<p>RISE TIME (Max)</p>	<p>230VAC/ 50ms 115VAC/ 50ms</p>	<p>I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C</p>	<p>230VAC/ 1.60ms 115VAC/1.80ms</p>
	<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p> 			<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p> 
9	<p>HOLD UP TIME(Typ)</p>	<p>230VAC/ 16ms 115VAC/ 12ms</p>	<p>I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C</p>	<p>230VAC/ 38.8ms 115VAC/ 34.8ms</p>
	<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage</p> 			<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage</p> 
10	<p>DYNAMIC LOAD</p>	<p>V1: 660mVp-p</p>	<p>I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C</p>	<p>234mVp-p 223mVp-p</p>



### INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	132V~264V
			I/P: (1)LOW-LINE-3V=167 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS ( POWER ON/OFF NO DAMAGE )	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 2.2A 115V/ 4A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I=1.41A/ 230VAC I=2.60A/ 115VAC
4	LEAKAGE CURRENT	< 2 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.407mA N-FG: 0.407mA
5	NO LOAD CONSUMPTION	< 0.75 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	<0.44 W < 0.38 W
6	INRUSH CURRENT(Typ)	230V/ 60A 115V/ 60A COLD START	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I=48.8A/ 230VAC I=44.4A/ 115VAC



## PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %~ 140 %	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	125.60%/ 230VAC 125.05%/115VAC Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH:3.8V~4.45V	3.901V/ 230VAC 3.913V/115VAC O/P: MIN LOAD Ta:25°C	Hiccup mode, recovers automatically after fault condition is removed
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P: FULL LOAD	O.T.P. Active Hiccup mode, recovers automatically after fault condition is removed



200W Single Output Switching Power Supply

LRS-200series

4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed
---	------------------	--	--	---

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	VERDICT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 2 Rated 12 A/500V	I/P:High-Line +3V =267V O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta:25°C	(1) 390V (2)404V (3)392 V	P
2	Diode Peak Voltage	Q102 Rated 120A/40V  Q103 Rated 120A/40V	I/P:High-Line +3V =267V O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta:25°C	Q102: (1)29.0V (2)28.5V (3)28.9 V  Q103: (1)22.9V (2)23.0V (3)22.7V	P
3	Input Capacitor Voltage	C5 Rated: 330 μ / 200V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)182V (2)182V (3)182V	P
4	Control IC Voltage Test	PWM IC U1 Rated 28 V (MAX.) 10V (MIN.)	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	U1 (1) 19.4V (2) 19.3V (3) 19.4V	P

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:0.6 KVAC/min Ta:25°C	I/P-O/P:2.369mA I/P-FG:3.03mA O/P-FG:2.70m A NO DAMAGE





200W Single Output Switching Power Supply

LRS-200series

		<table border="1"> <tr> <td>20</td> <td>L101</td> <td>77.6°C</td> <td>89.7°C</td> </tr> <tr> <td>21</td> <td>Q101</td> <td>77.2°C</td> <td>91.9°C</td> </tr> <tr> <td>22</td> <td>Q103</td> <td>69.3°C</td> <td>83.5°C</td> </tr> <tr> <td>23</td> <td>Q104</td> <td>64.7°C</td> <td>78.9°C</td> </tr> </table>	20	L101	77.6°C	89.7°C	21	Q101	77.2°C	91.9°C	22	Q103	69.3°C	83.5°C	23	Q104	64.7°C	78.9°C	
20	L101	77.6°C	89.7°C																
21	Q101	77.2°C	91.9°C																
22	Q103	69.3°C	83.5°C																
23	Q104	64.7°C	78.9°C																
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P: 230 VAC O/P: 125 % LOAD Ta: 25°C	TEST: OK															
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 % LOAD Ta= -25 °C	TEST: OK															
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST: OK															
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P: 230 VAC O/P: FULL LOAD	±0.008%/°C (0~50°C)															
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK															
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C ~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK															
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z)		TEST: OK															





200W Single Output Switching Power Supply

**LRS-200series**

		(6) Ta: 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta=40 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 40 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 40 °C LIFE TIME	(1) 65146HRS (2) 22444HRS (3) 81836HRS (4) 207180HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 347.5KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ