



# Test Report: HLG-100H-42

---

100W Constant Voltage + Constant Current LED Driver

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Other Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

**DESIGN VERIFY TEST**

**OUTPUT FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RIPPLE & NOISE	V1: 200 mVp-p (Max)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	V1: 60 mVp-p (Max)
2	OUTPUT VOLTAGE ADJUST RANGE	CH1: 38V-46 V	I/P: 230 VAC I/P:115VAC O/P:MIN LOAD Ta:25°C	36.98 V-47.17 V /230VAC 36.98 V-47.17 V/115VAC
3	CURRENT ADJ RANGE	1.4A-2.28A	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	0.717 A- 3.373 A
4	CONSTANT CURRENT REGION	21V-42V	I/P: 230 VAC O/P:CV MODE Ta:25°C	O/P=21V:2.999 A O/P=41V: 2.983 A
5	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ 1% (Max)	I/P: 100 VAC /305VAC O/P:FULL/ 0% LOAD Ta:25°C	V1: -0.03 %- 0.03 %
6	LINE REGULATION	V1: - 0.5% ~ 0.5% (Max)	I/P:100 VAC ~305 VAC O/P:FULL LOAD Ta:25°C	V1: 0 %- 0 %
7	LOAD REGULATION	V1: - 0.5% ~ 0.5% (Max)	I/P: 230 VAC O/P:FULL -MIN LOAD Ta:25°C	V1: -0.02 %- 0.02 %
8	SET UP TIME	230VAC/ 500 ms (Max) 115VAC/ 1200 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 394 ms 115 VAC/ 824 ms
9	RISE TIME	230VAC/ 50 ms (Max) 115VAC/ 50 ms (Max)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 18 ms 115 VAC/ 18 ms
10	HOLD UP TIME	230VAC/ 16 ms (Typ) 115VAC/ 16ms (Typ)	I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	230VAC/ 27 ms 115 VAC/ 28 ms
11	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST:< 5 %
12	DYNAMIC LOAD	V1: 4200 mVp-p	I/P: 230 VAC O/P:(1)FULL /Min LOAD 90%DUTY/1KHZ (2)FULL /Min LOAD 90%DUTY/120HZ Ta:25°C	312 mVp-p 1670 mVp-p

13	DIMMER TEST (B Type only)	SPEC:											
		*Reference resistance value for output current adjustment (Typical)											
		Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*1 ~ 10V dimming function for output current adjustment (Typical)											
		Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		*10V PWM signal for output current adjustment (Typical)											
		Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
		TEST RESULT: I/P : 230 VAC ; Ta : 25°C											
		1	Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K
			Output current	0.340A	0.552A	0.768A	0.993A	1.203A	1.431A	1.638A	1.862A	2.098A	2.286A
%	14.91%		24.21%	33.68%	43.55%	52.76%	62.76%	71.84%	81.67%	92.02%	100.26%		
2	Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V		
	Output current	0.340A	0.556A	0.763A	0.975A	1.191A	1.401A	1.609A	1.820A	2.026A	2.232A		
	%	14.91%	24.39%	33.46%	42.76%	52.24%	61.45%	70.57%	79.82%	88.86%	97.89%		
3	Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%		
	Output current	0.341A	0.567A	0.790A	1.002A	1.215A	1.426A	1.636A	1.845A	2.052A	2.260A		
	%	14.96%	24.87%	34.65%	43.95%	53.29%	62.54%	71.75%	80.92%	90.00%	99.12%		

**INPUT FUNCTION TEST**

NO	TEST ITEM	SPECICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	77 V~305V
			I/P: (1)LOW-LINE-3V=87 V (2)HIGH-LINE=305 V O/P:FULL/MIN LOAD ON: 30 Sec . OFF: 30 Sec 10MIN ( AC POWER ON/OFF NO DAMAGE )	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305VAC O/P:FULL-MIN LOAD Ta:25°C	OK
3	POWER FACTOR	0.95/ 230 VAC FULL LOAD (TYP) 0.98/ 115 VAC FULL LOAD (TYP) 0.93/ 277 VAC FULL LOAD (TYP)	I/P: 230 VAC I/P: 115 VAC I/P: 277 VAC O/P:FULL LOAD Ta:25°C	PF=0.960/230V/100%LOAD PF=0.997/115V/100%LOAD PF=0.941/277V/100%LOAD
4	EFFICIENCY	93% (TYP)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	93.6 %
5	INPUT CURRENT	277V /0.5 A 230 V/ 0.55 A 115 V/ 1.2 A	I/P: 277 VAC I/P: 230 VAC I/P: 115 VAC O/P:FULL LOAD Ta:25°C	I = 0.42 A/ 277VAC I = 0.46 A/ 230VAC I = 0.92 A/ 115VAC
6	INRUSH CURRENT	230 V/ 60A (Typ) COLD START	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	I = 56 A/ 230VAC
7	TOTAL HARMONIC DISTORTION	THD< 20% when output loading $\geq$ 60% at 115VAC/230VAC input and output loading $\geq$ 75% at 277VAC input	I/P : 115 VAC I/P : 230 VAC O/P : 60% LOAD  I/P : 277 VAC O/P : 75%LOAD Ta : 25°C	THD : 10 /115VAC THD : 16.54 /230VAC THD : 17.96 /277VAC

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95 %-106 %	I/P: 305VAC I/P: 230 VAC I/P: 100 VAC O/P:TESTING Ta:25°C	102 %/305VAC 102 %/ 230VAC 102 %//100VAC Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	V1: 47V-53V	I/P: 305VAC I/P: 230 VAC I/P: 90 VAC O/P:MIN LOAD Ta:25°C	49.33 V/ 305VAC 49.52 V/ 230VAC 49.55 V/ 100VAC Shut down o/p voltage with auto recovery or re-power on to recovery
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P:FULL LOAD	O.T.P. Active Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Constant current limiting, recovers automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor ( D to S) or (C to E) Peak Voltage	Q5 Rated 12A/500V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 472 V (2) 452 V (3) 452 V
2	Diode Peak Voltage	Q101 Rated 40A/120V	I/P : High-Line +3V =308V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 104 V (2) 52 V (3) 94 V
		Q102 Rated 40A/120V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 104 V (2) 65.2 V (3) 94 V
3	Input Capacitor Voltage	C5 Rated: 82u/450V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 435.5 V (2) 435.5 V (3) 435.7 V
4	Control IC Voltage Test	U 900 Rated 8.85V~16V	I/P : High-Line +3V = 308V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 13.681 V (2) 13.591 V (3) 13.832 V
5	P.F.C Transistor ( D to S) or (C to E) Peak Voltage	Q1 Rated 17A/600V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue	(1) 504 V (2) 458 V (3) 454 V

**SAFETY & EMC TEST**

**SAFETY TEST**

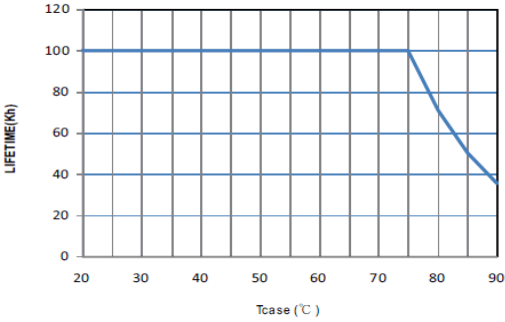
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG:2 KVAC/min<4.5mA O/P-FG:1.5KVAC/min	I/P-O/P: 4 KVAC/min I/P-FG: 2.4KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 2.769 mA I/P-FG: 2.455 mA O/P-FG: 3.61 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 15.9 GΩ I/P-FG: 15.3 GΩ O/P-FG: 30 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	11 mΩ
4	LEAKAGE CURRENT	IEC60950-1 < 0.75 mA / 240VAC	I/P: 240 VAC O/P:Min LOAD Ta:25°C	L-FG: 0.20 mA N-FG: 0.20 mA
5	APPROVAL	TUV: Certificate NO : E334940 UL: File NO : R50185176		

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ LOAD:LED/ELECTRONIC LOAD O/P:100% LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55022 EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL : HLG-100H-24 1. ROOM AMBIENT BURN-IN : 2.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 30.7 °C 2. HIGH AMBIENT BURN-IN : 5.5 HRS I/P : 230VAC O/P : FULL LOAD Ta=60.7 °C	<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 30.7 °C</th> <th>HIGH AMBIENT Ta= 60.7 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>BD1</td><td>46.8°C</td><td>74.8°C</td></tr> <tr><td>2</td><td>Q1</td><td>48.1°C</td><td>76.1°C</td></tr> <tr><td>3</td><td>L2</td><td>48.8°C</td><td>76.8°C</td></tr> <tr><td>4</td><td>Q5</td><td>48.2°C</td><td>76.2°C</td></tr> <tr><td>5</td><td>D2</td><td>48.8°C</td><td>76.8°C</td></tr> <tr><td>6</td><td>RTH2</td><td>46.3°C</td><td>74.3°C</td></tr> <tr><td>7</td><td>C5</td><td>45.5°C</td><td>73.5°C</td></tr> <tr><td>8</td><td>T1</td><td>49.3°C</td><td>77.3°C</td></tr> <tr><td>9</td><td>Q101</td><td>47.4°C</td><td>75.4°C</td></tr> <tr><td>10</td><td>D9</td><td>47.0°C</td><td>75.0°C</td></tr> <tr><td>11</td><td>C102</td><td>45.3°C</td><td>73.3°C</td></tr> <tr><td>12</td><td>C201</td><td>46.3°C</td><td>74.3°C</td></tr> <tr><td>13</td><td>C38</td><td>48.2°C</td><td>76.2°C</td></tr> <tr><td>14</td><td>U900</td><td>47.4°C</td><td>75.4°C</td></tr> <tr><td>15</td><td>U1</td><td>49.4°C</td><td>77.4°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 30.7 °C	HIGH AMBIENT Ta= 60.7 °C	1	BD1	46.8°C	74.8°C	2	Q1	48.1°C	76.1°C	3	L2	48.8°C	76.8°C	4	Q5	48.2°C	76.2°C	5	D2	48.8°C	76.8°C	6	RTH2	46.3°C	74.3°C	7	C5	45.5°C	73.5°C	8	T1	49.3°C	77.3°C	9	Q101	47.4°C	75.4°C	10	D9	47.0°C	75.0°C	11	C102	45.3°C	73.3°C	12	C201	46.3°C	74.3°C	13	C38	48.2°C	76.2°C	14	U900	47.4°C	75.4°C	15	U1	49.4°C	77.4°C	
NO	Position	ROOM AMBIENT Ta= 30.7 °C	HIGH AMBIENT Ta= 60.7 °C																																																																	
1	BD1	46.8°C	74.8°C																																																																	
2	Q1	48.1°C	76.1°C																																																																	
3	L2	48.8°C	76.8°C																																																																	
4	Q5	48.2°C	76.2°C																																																																	
5	D2	48.8°C	76.8°C																																																																	
6	RTH2	46.3°C	74.3°C																																																																	
7	C5	45.5°C	73.5°C																																																																	
8	T1	49.3°C	77.3°C																																																																	
9	Q101	47.4°C	75.4°C																																																																	
10	D9	47.0°C	75.0°C																																																																	
11	C102	45.3°C	73.3°C																																																																	
12	C201	46.3°C	74.3°C																																																																	
13	C38	48.2°C	76.2°C																																																																	
14	U900	47.4°C	75.4°C																																																																	
15	U1	49.4°C	77.4°C																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 305 VAC O/P : O/P SHORT TEST Ta : 25°C	TEST : OK																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305 VAC/230 VAC/100VAC O/P : 95% load Ta= -40 °C	TEST : OK																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 305 VAC O/P : 95% load Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %(0-50°C)	I/P : 305 VAC O/P : FULL LOAD	± 0 %(0-50°C)																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load TURN ON/58 SEC;TURN OFF/2 SEC.		OK																																																																

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	HLG-100H-24:SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60 °C LIFE TIME	(1) 1380862 HRS (2) 140238 HRS (3) 161122 HRS (4) 172705 HRS
10	MTBF	M Conducted by Parts Stress Analysis Prediction 192.2 hrs min. MIL-HDBK-217F (25°C)	OK
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 62,000 hours @ Tcase 80°C  	<b>OK</b>

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

2003/12/12 A50-F023