



# Test Report: HLG-80H-30

---

80W Constant Voltage + Constant Current LED Driver

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONSTANT CURRENT REGION	18V~30V	I/P : 230VAC O/P : CV=18V~29V Ta : 25°C	TEST : OK
2	RIPPLE & NOISE	V1 : 200 mVp-p (Max)	I/P : 230VAC O/P : FULL LOAD Ta : 25°C	V1 : 19.4 mVp-p (Max)
3	OUTPUT VOLTAGE ADJUST RANGE	CH1 : 27V ~ 33 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	26.259 V ~ 33.925 V / 230 VAC 26.260 V ~ 33.925 V / 115 VAC
4	CURRENT ADJUST RANGE	CH1 : 1.62 A ~ 2.7 A	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	1.035 A ~ 3.153 A / 230 VAC 1.049 A ~ 3.164 A / 115 VAC
5	OUTPUT VOLTAGE TOLERANCE	V1 : 1 %~ -1 % (Max)	I/P : 100 VAC / 305 VAC O/P : FULL / MIN LOAD Ta : 25°C	V1 : 0.09 %~ -0.09 %
6	LINE REGULATION	V1 : 0.5 %~ -0.5 % (Max)	I/P : 100VAC ~ 305 VAC O/P : FULL LOAD Ta : 25°C	V1 : 0 %~ 0 %
7	LOAD REGULATION	V1 : 0.5%~ -0.5 % (Max)	I/P : 230 VAC O/P : FULL ~MIN LOAD Ta : 25°C	V1 : 0.09 %~ -0.09 %
8	SET UP TIME	230VAC : 500 ms (Max) 115VAC : 1200 ms(Max)	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 294 ms 115VAC/ 330 ms
9	RISE TIME	230VAC : 200 ms (Max) 115VAC : 200 ms (Max)	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 32 ms 115VAC/ 28 ms
10	HOLD UP TIME	230VAC : 16 ms (TYP) 115VAC : 16 ms (TYP)	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 82 ms 115VAC/ 35 ms
11	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	TEST : <5 %
12	DYNAMIC LOAD	V1 : 3000 mVp-p	I/P : 230 VAC (1).O/P : FULL /Min LOAD 90%DUTY/ 1KHZ (2).O/P : FULL /Min LOAD 50%DUTY/ 120HZ Ta : 25°C	(1)253 mVp-p (2)573 mVp-p

13	DIMMER TEST (for B-type only)	SPEC:																																
		*Reference resistance value for output current adjustment (Typical)																																
		<table border="1"> <tr> <th>Resistance value</th> <th>10K</th> <th>20K</th> <th>30K</th> <th>40K</th> <th>50K</th> <th>60K</th> <th>70K</th> <th>80K</th> <th>90K</th> <th>100K</th> </tr> <tr> <th>Output current</th> <td>10%</td> <td>20%</td> <td>30%</td> <td>40%</td> <td>50%</td> <td>60%</td> <td>70%</td> <td>80%</td> <td>90%</td> <td>100%</td> </tr> </table>	Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%										
		Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K																						
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																						
		*1 ~ 10V dimming function for output current adjustment (Typical)																																
		<table border="1"> <tr> <th>Dimming value</th> <th>1V</th> <th>2V</th> <th>3V</th> <th>4V</th> <th>5V</th> <th>6V</th> <th>7V</th> <th>8V</th> <th>9V</th> <th>10V</th> </tr> <tr> <th>Output current</th> <td>10%</td> <td>20%</td> <td>30%</td> <td>40%</td> <td>50%</td> <td>60%</td> <td>70%</td> <td>80%</td> <td>90%</td> <td>100%</td> </tr> </table>	Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%										
		Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V																						
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																						
		*10V PWM signal for output current adjustment (Typical)																																
		<table border="1"> <tr> <th>Duty value</th> <th>10%</th> <th>20%</th> <th>30%</th> <th>40%</th> <th>50%</th> <th>60%</th> <th>70%</th> <th>80%</th> <th>90%</th> <th>100%</th> </tr> <tr> <th>Output current</th> <td>10%</td> <td>20%</td> <td>30%</td> <td>40%</td> <td>50%</td> <td>60%</td> <td>70%</td> <td>80%</td> <td>90%</td> <td>100%</td> </tr> </table>	Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%										
		Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																						
		Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																						
TEST RESULT: I/P : 230 VAC ;Ta : 25°C																																		
<table border="1"> <tr> <th rowspan="3">1</th> <th>Resistance value</th> <th>10K</th> <th>20K</th> <th>30K</th> <th>40K</th> <th>50K</th> <th>60K</th> <th>70K</th> <th>80K</th> <th>90K</th> <th>100K</th> </tr> <tr> <th>Output current</th> <td>0.318A</td> <td>0.583A</td> <td>0.845A</td> <td>1.121A</td> <td>1.404A</td> <td>1.683A</td> <td>1.954A</td> <td>2.235A</td> <td>2.547A</td> <td>2.791A</td> </tr> <tr> <th>%</th> <td>11.78%</td> <td>21.59%</td> <td>31.30%</td> <td>41.52%</td> <td>52.00%</td> <td>62.33%</td> <td>72.37%</td> <td>82.78%</td> <td>94.33%</td> <td>103.37%</td> </tr> </table>	1	Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	Output current	0.318A	0.583A	0.845A	1.121A	1.404A	1.683A	1.954A	2.235A	2.547A	2.791A	%	11.78%	21.59%	31.30%	41.52%	52.00%	62.33%	72.37%	82.78%	94.33%	103.37%
1		Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K																						
		Output current	0.318A	0.583A	0.845A	1.121A	1.404A	1.683A	1.954A	2.235A	2.547A	2.791A																						
	%	11.78%	21.59%	31.30%	41.52%	52.00%	62.33%	72.37%	82.78%	94.33%	103.37%																							
<table border="1"> <tr> <th rowspan="3">2</th> <th>Dimming value</th> <th>1V</th> <th>2V</th> <th>3V</th> <th>4V</th> <th>5V</th> <th>6V</th> <th>7V</th> <th>8V</th> <th>9V</th> <th>10V</th> </tr> <tr> <th>Output current</th> <td>0.312A</td> <td>0.575A</td> <td>0.824A</td> <td>1.095A</td> <td>1.364A</td> <td>1.636A</td> <td>1.904A</td> <td>2.170A</td> <td>2.437A</td> <td>2.708A</td> </tr> <tr> <th>%</th> <td>11.56%</td> <td>21.30%</td> <td>30.52%</td> <td>40.56%</td> <td>50.52%</td> <td>60.59%</td> <td>70.52%</td> <td>80.37%</td> <td>90.26%</td> <td>100.30%</td> </tr> </table>	2	Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	Output current	0.312A	0.575A	0.824A	1.095A	1.364A	1.636A	1.904A	2.170A	2.437A	2.708A	%	11.56%	21.30%	30.52%	40.56%	50.52%	60.59%	70.52%	80.37%	90.26%	100.30%
2		Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V																						
		Output current	0.312A	0.575A	0.824A	1.095A	1.364A	1.636A	1.904A	2.170A	2.437A	2.708A																						
	%	11.56%	21.30%	30.52%	40.56%	50.52%	60.59%	70.52%	80.37%	90.26%	100.30%																							
<table border="1"> <tr> <th rowspan="3">3</th> <th>Duty value</th> <th>10%</th> <th>20%</th> <th>30%</th> <th>40%</th> <th>50%</th> <th>60%</th> <th>70%</th> <th>80%</th> <th>90%</th> <th>100%</th> </tr> <tr> <th>Output current</th> <td>0.253A</td> <td>0.530A</td> <td>0.791A</td> <td>1.073A</td> <td>1.354A</td> <td>1.636A</td> <td>1.916A</td> <td>2.198A</td> <td>2.479A</td> <td>2.758A</td> </tr> <tr> <th>%</th> <td>9.37%</td> <td>19.63%</td> <td>29.30%</td> <td>39.74%</td> <td>50.15%</td> <td>60.59%</td> <td>70.96%</td> <td>81.41%</td> <td>91.81%</td> <td>102.15%</td> </tr> </table>	3	Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Output current	0.253A	0.530A	0.791A	1.073A	1.354A	1.636A	1.916A	2.198A	2.479A	2.758A	%	9.37%	19.63%	29.30%	39.74%	50.15%	60.59%	70.96%	81.41%	91.81%	102.15%
3		Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																						
		Output current	0.253A	0.530A	0.791A	1.073A	1.354A	1.636A	1.916A	2.198A	2.479A	2.758A																						
	%	9.37%	19.63%	29.30%	39.74%	50.15%	60.59%	70.96%	81.41%	91.81%	102.15%																							

### INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C  I/P : LOW-LINE=3V= 87 V HIGH-LINE=305 V O/P : FULL/MIN LOAD ON : 30 Sec. OFF : 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	72 V~305V  TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P : 90 VAC ~ 305 VAC O/P : FULL -MIN LOAD Ta : 25°C	TEST : OK
3	POWER FACTOR	0.96 / 230 VAC(TYP) 0.96 / 115 VAC(TYP) 0.94 / 277 VAC(TYP)	I/P : 230 VAC I/P : 115 VAC I/P : 277 VAC O/P : FULL LOAD Ta : 25°C	PF= 0.964 / 230 VAC PF= 0.991 / 115 VAC PF= 0.945 / 277 VAC
4	EFFICIENCY	91 % (TYP)	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	91.64 %
5	INPUT CURRENT	277V/ 0.4 A (TYP) 230V/ 0.425 A (TYP)	I/P : 277 VAC I/P : 230 VAC	I = 0.34 A/ 277 VAC I = 0.39 A/ 230 VAC

		115V/ 0.85 A (TYP)	I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I = 0.77 A/ 115 VAC
6	INRUSH CURRENT	230V/ 70 A (TYP)  COLD START	I/P : 230 VAC  O/P : FULL LOAD Ta : 25°C	I = 69 A/ 230 VAC
7	LEAKAGE CURRENT	< 0.75 mA / 277 VAC	I/P : 277 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.2 mA N-FG : 0.2 mA
8	TOTAL HARMONIC DISTORTION	THD < 20% when output loading $\geq$ 60% at 115VAC/230VAC input and output loading $\geq$ 75% at 277VAC input	I/P : 115 VAC I/P : 230 VAC O/P : 60% LOAD  I/P : 277 VAC O/P : 75%LOAD Ta : 25°C	THD : 9.08 /115VAC THD : 15.56 /230VAC  THD : 15.61 /277VAC

**PROTECTION FUNCTION TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	95 % ~ 108 %	I/P : 230 VAC I/P : 115 VAC O/P : TESTING Ta : 25°C	101 %/ 230 VAC 101 %/ 115 VAC Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH1 : 35 V ~ 43 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	36.943 V/ 230 VAC 36.981 V/ 115 VAC Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P : 230 VAC O/P : FULL LOAD	O.T.P. Active Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P : 305 VAC O/P : FULL LOAD Ta : 25°C	NO DAMAGE Constant current limiting, recovers automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor ( D to S) or (C to E) Peak Voltage	Q 1 Rated : 12A/700V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 616 V (2) 476 V (3) 612 V
2	Diode Peak Voltage	Q101 Rated : 30A/150V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 145 V (2) 106 V (3) 144 V
3	Clamp Diode Peak Voltage	D12 Rated : 2A/800V	I/P : High-Line +3V = 308 V O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1) 596 V (2) 592 V
4	Input Capacitor Voltage	C 5 Rated : 82u/450V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 419.82 V (2) 431.60 V (3) 431.20 V
5	Control IC Voltage Test	U1 Rated : 16V~38V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 21.381 V (2) 21.371 V (3) 21.355 V
6	Power Transistor ( D to S) or (C to E) Peak Voltage	Q2 Rated : 10A/600V	I/P : High-Line +3V = 308 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 500 V (2) 460 V (3) 456 V

■ SAFETY & E.M.C. TEST

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.75 KVAC/min I/P-FG : 2KVAC/min<4.5mA O/P-FG : 1.5 KVAC/min	I/P-O/P : 4 KVAC/min I/P-FG : 2.4KVAC/min O/P-FG : 1.8 KVAC/min Ta : 25°C	I/P-O/P : 2.401 mA I/P-FG : 2.043 mA O/P-FG : 0.405 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ I/P-FG : 500VDC>100MΩ O/P-FG : 500VDC>100MΩ	I/P-O/P : 500 VDC I/P-FG : 500 VDC O/P-FG : 500 VDC Ta : 25°C /70%RH	I/P-O/P : 30 GΩ I/P-FG : 30 GΩ O/P-FG : 30 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta : 25°C / 70%RH	9 mΩ
4	APPROVAL	TUV : Certificate NO : R50202516 UL : File NO : E334687		

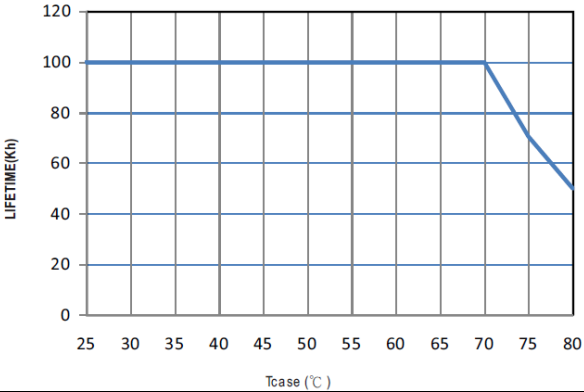
**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P:100% ELECTRONICLOAD O/P:100%LED LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																				
1	TEMPERATURE RISE TEST	MODEL : HLG-80H-24 1. ROOM AMBIENT BURN-IN : 13.5 HRS I/P : 230VAC O/P : 95% LOAD Ta=25.1 °C °C 2. HIGH AMBIENT BURN-IN : 67 HRS I/P : 230VAC O/P : 95% LOAD Ta= 63.8 °C °C	<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=25.1 °C</th> <th>HIGH AMBIENT Ta= 63.8°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>46.1°C</td><td>78.3°C</td></tr> <tr><td>2</td><td>BD1</td><td>51.3°C</td><td>83.2°C</td></tr> <tr><td>3</td><td>L1</td><td>50.3°C</td><td>81.6°C</td></tr> <tr><td>4</td><td>C5</td><td>50.1°C</td><td>81.2°C</td></tr> <tr><td>5</td><td>Q1</td><td>54.2°C</td><td>86.2°C</td></tr> <tr><td>6</td><td>Q2</td><td>52.5°C</td><td>84.1°C</td></tr> <tr><td>7</td><td>U1</td><td>48.1°C</td><td>79.7°C</td></tr> <tr><td>8</td><td>RTH2</td><td>48.5°C</td><td>79.9°C</td></tr> <tr><td>9</td><td>T1</td><td>55.7°C</td><td>86.7°C</td></tr> <tr><td>10</td><td>Q101</td><td>52.0°C</td><td>83.8°C</td></tr> <tr><td>11</td><td>C106</td><td>50.0°C</td><td>81.8°C</td></tr> <tr><td>12</td><td>L100</td><td>47.9°C</td><td>79.9°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=25.1 °C	HIGH AMBIENT Ta= 63.8°C	1	LF1	46.1°C	78.3°C	2	BD1	51.3°C	83.2°C	3	L1	50.3°C	81.6°C	4	C5	50.1°C	81.2°C	5	Q1	54.2°C	86.2°C	6	Q2	52.5°C	84.1°C	7	U1	48.1°C	79.7°C	8	RTH2	48.5°C	79.9°C	9	T1	55.7°C	86.7°C	10	Q101	52.0°C	83.8°C	11	C106	50.0°C	81.8°C	12	L100	47.9°C	79.9°C	
NO	Position	ROOM AMBIENT Ta=25.1 °C	HIGH AMBIENT Ta= 63.8°C																																																					
1	LF1	46.1°C	78.3°C																																																					
2	BD1	51.3°C	83.2°C																																																					
3	L1	50.3°C	81.6°C																																																					
4	C5	50.1°C	81.2°C																																																					
5	Q1	54.2°C	86.2°C																																																					
6	Q2	52.5°C	84.1°C																																																					
7	U1	48.1°C	79.7°C																																																					
8	RTH2	48.5°C	79.9°C																																																					
9	T1	55.7°C	86.7°C																																																					
10	Q101	52.0°C	83.8°C																																																					
11	C106	50.0°C	81.8°C																																																					
12	L100	47.9°C	79.9°C																																																					
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 95 % LOAD Ta= -40°C/-25 °C	TEST : OK																																																				
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 305 VAC O/P : 95% LOAD Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK																																																				
4	TEMPERATURE COEFFICIENT	± 0.03 % (0-50°C)	I/P : 230 VAC O/P : 95% LOAD	± 0.02 % (0-50°C)																																																				
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																				
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -40°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Fu11 Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																				

7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10-500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK																										
8	CAPACITOR LIFE CYCLE	HLG-80H-24:SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60 °C LIFE TIME	(1) 623397 HRS (2) 88920 HRS (3) 105147 HRS (4) 136572HRS																										
9	MTBF	Conducted by Parts Stress Analysis Prediction 357.8K hrs min. MIL-HDBK-217F (25°C)																											
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 62,000 hours @ Tcase 75°C  <table border="1" data-bbox="491 824 1077 1214"> <caption>Graph Data: Lifetime (kh) vs Tcase (°C)</caption> <thead> <tr> <th>Tcase (°C)</th> <th>Lifetime (kh)</th> </tr> </thead> <tbody> <tr><td>25</td><td>100</td></tr> <tr><td>30</td><td>100</td></tr> <tr><td>35</td><td>100</td></tr> <tr><td>40</td><td>100</td></tr> <tr><td>45</td><td>100</td></tr> <tr><td>50</td><td>100</td></tr> <tr><td>55</td><td>100</td></tr> <tr><td>60</td><td>100</td></tr> <tr><td>65</td><td>100</td></tr> <tr><td>70</td><td>100</td></tr> <tr><td>75</td><td>70</td></tr> <tr><td>80</td><td>50</td></tr> </tbody> </table>		Tcase (°C)	Lifetime (kh)	25	100	30	100	35	100	40	100	45	100	50	100	55	100	60	100	65	100	70	100	75	70	80	50
Tcase (°C)	Lifetime (kh)																												
25	100																												
30	100																												
35	100																												
40	100																												
45	100																												
50	100																												
55	100																												
60	100																												
65	100																												
70	100																												
75	70																												
80	50																												

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

2009/08/04 A50-F023